33 CLASS 12 MM

## SUNFL OR

Living better is easy!







## Kastamonu presents a new collection of modern and eco-friendly Sunfloor laminate floorings.

This collection uses a new narrow format of floorboards of 1380x159 mm with a thickness of 12 mm. Abrasion class - 33.

Key characteristics of Sunfloor are deep embossing, a wide range of design solutions, and high-quality natural wood structure. These floors perfectly create a sense of warmth and coziness.

It is produced at Europe's largest wood processing plant located in the city of Yelabuga (Republic of Tatarstan).

## **Specifications**

33 CLASS 8 MM



Board dimensions	1380 x 159 x 12 mm 54 1/3 x 6 13/50 x 43/91 in
Floor area per pack	1,755 m² 18 17/19 sq. Ft
Number of boards per pack	8 pcs
Pack weight	18 kg 39 28/41 Lb
Number of packs on pallet	50 pcs
Gross weight of pallet	893 kg 1968 37/51 Lb
Application class	33
Bevel	4V
Lock system	UNICLIC
Surface texture	V (vintage) C (country)






























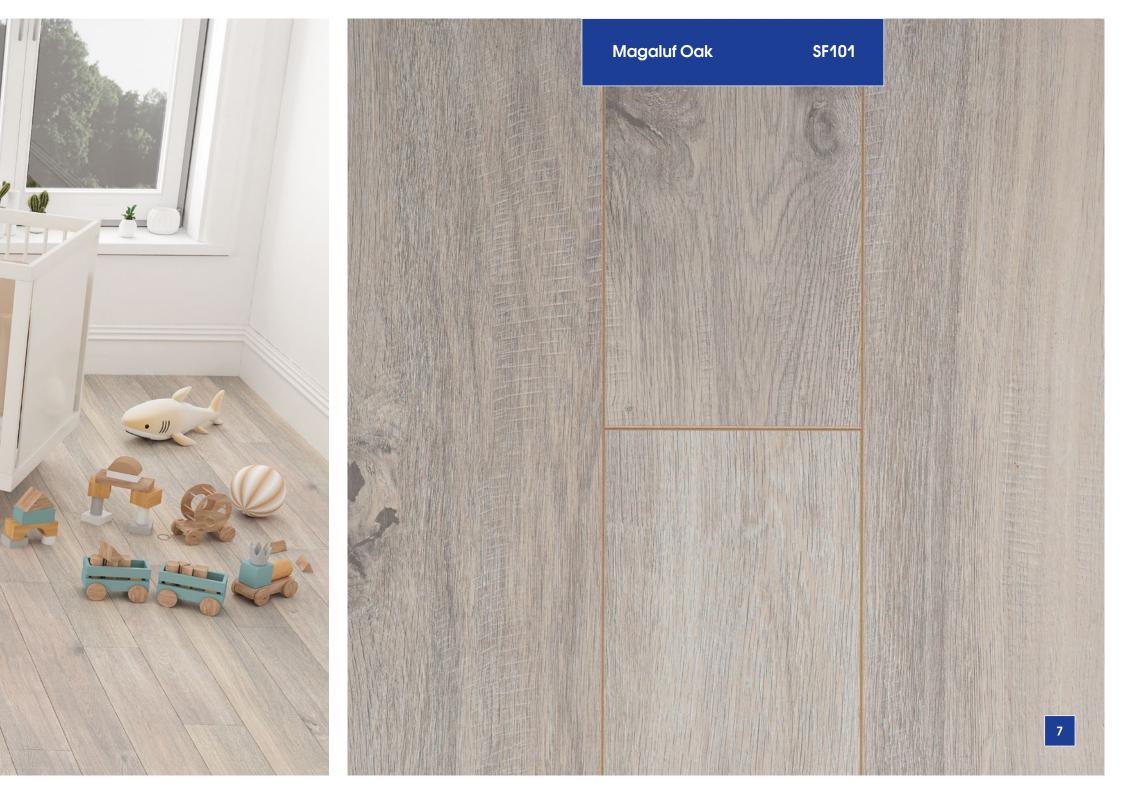


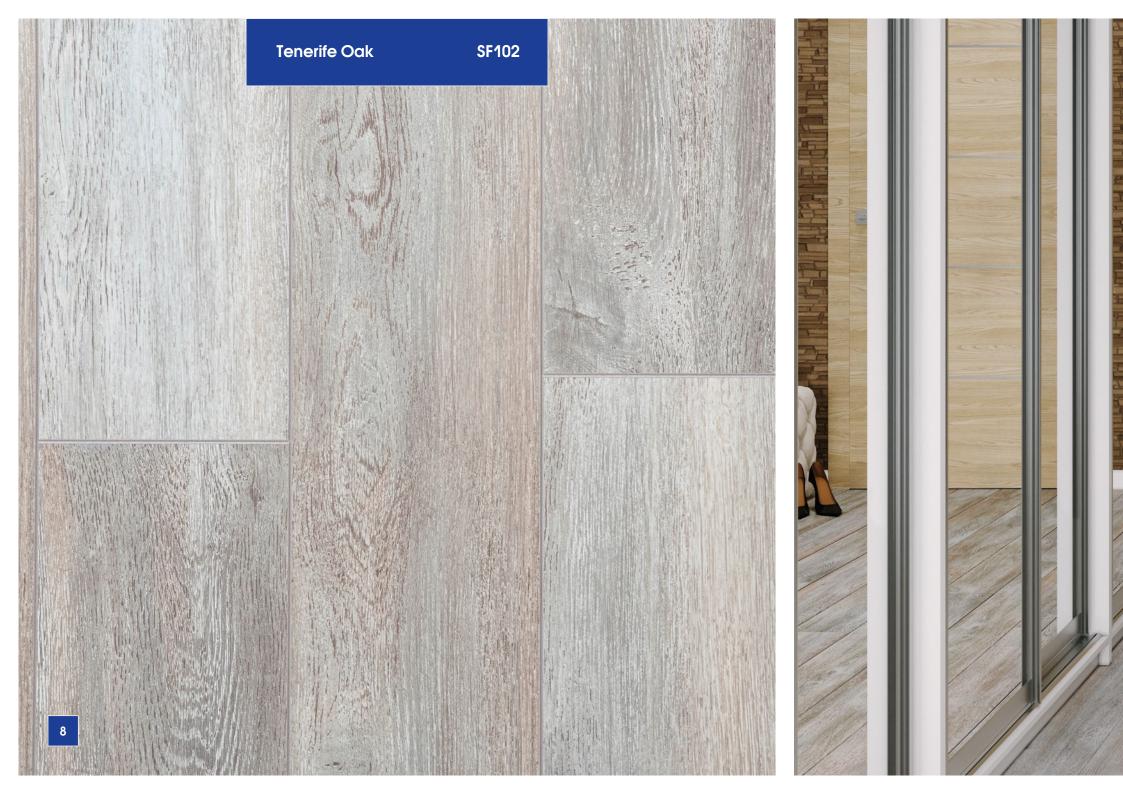

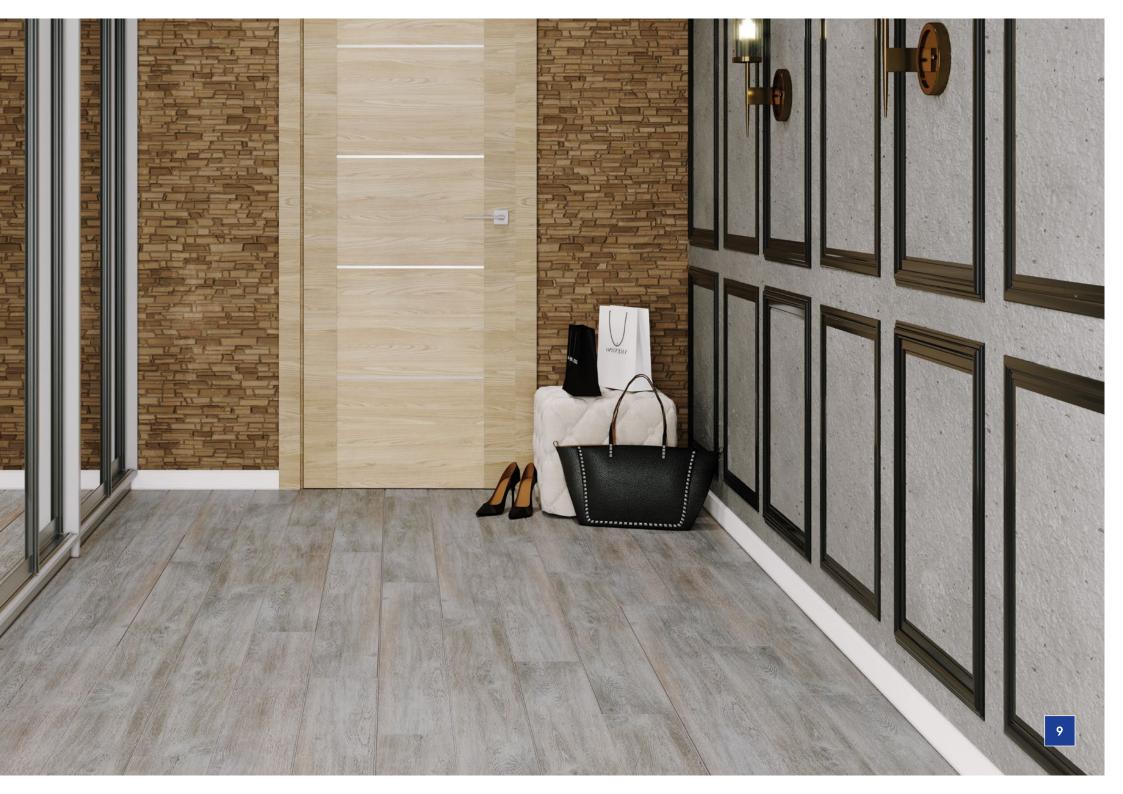


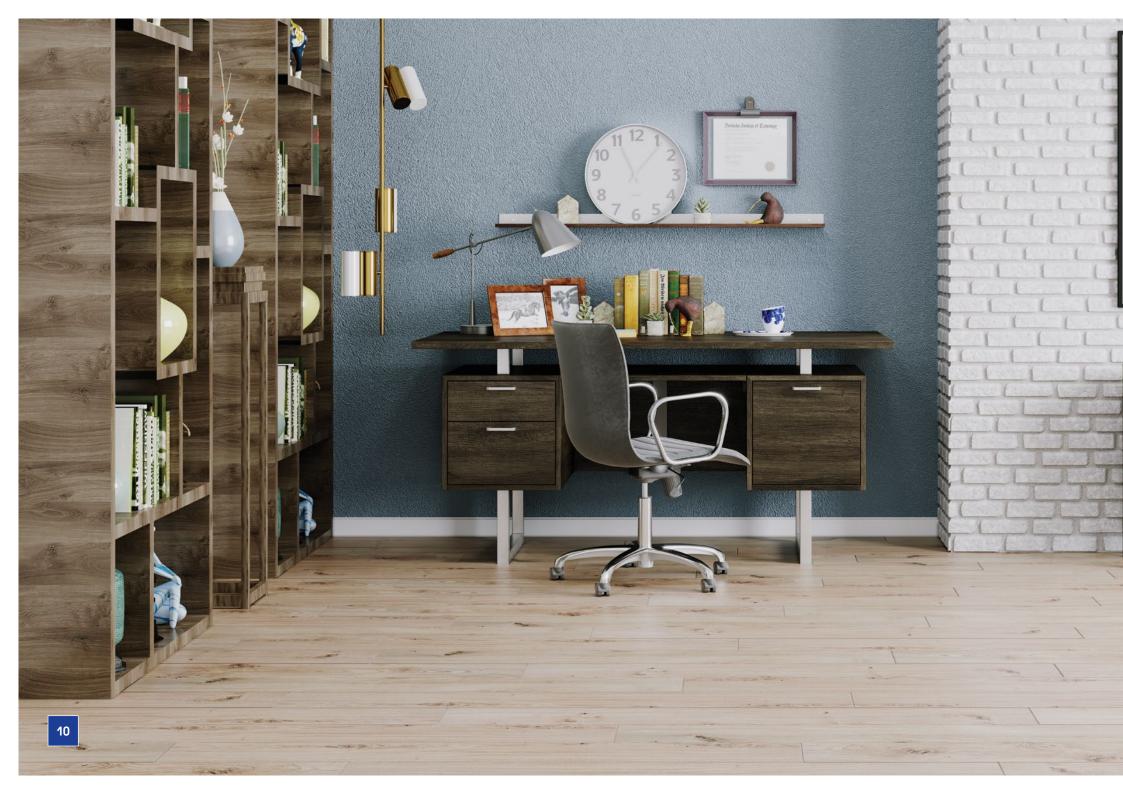


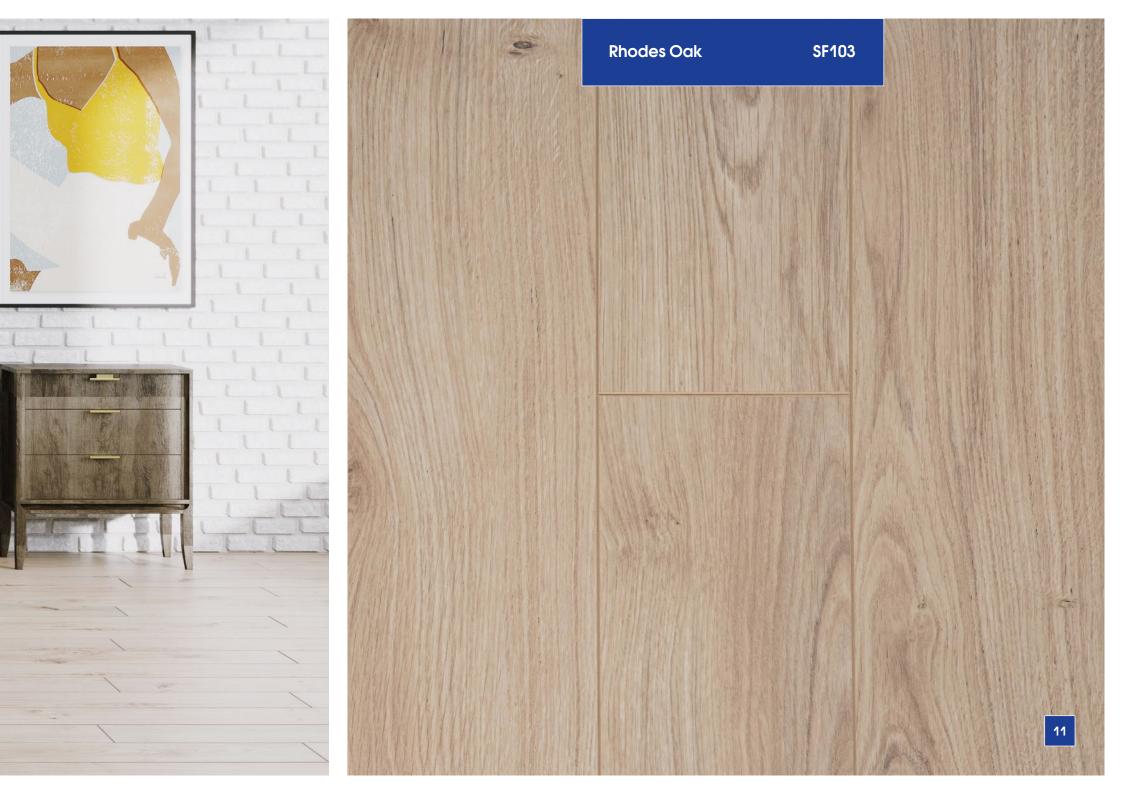


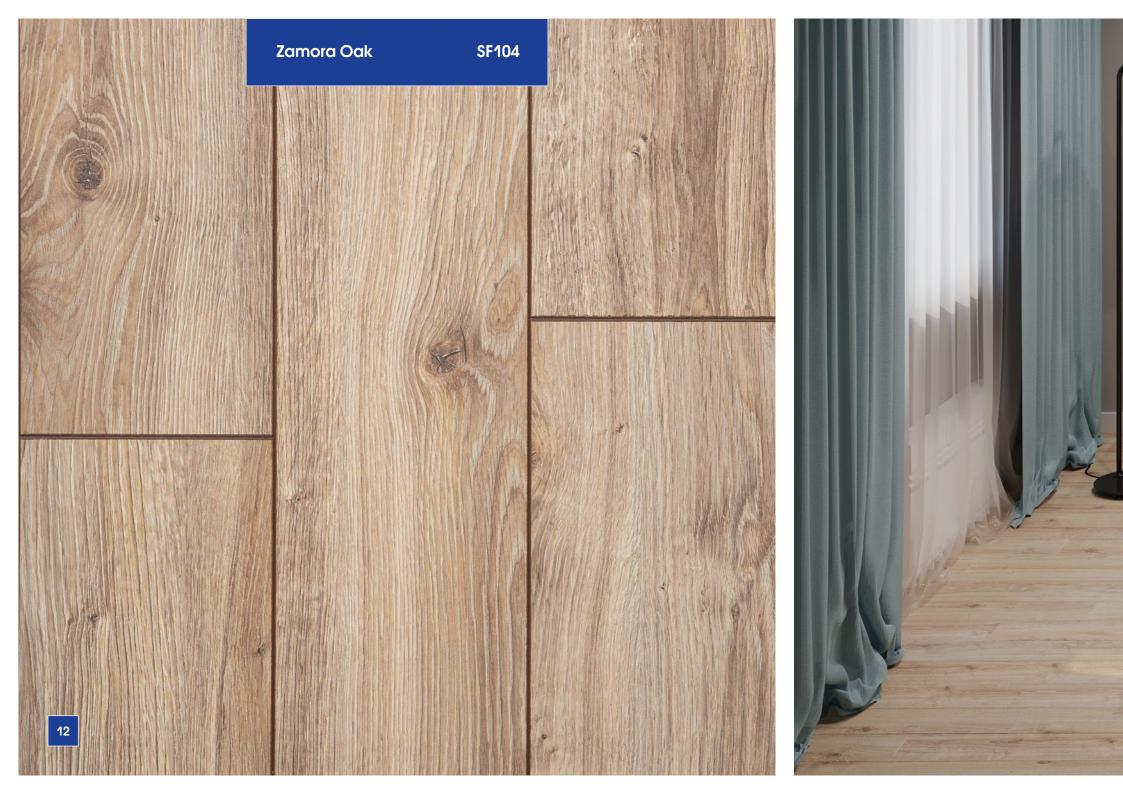




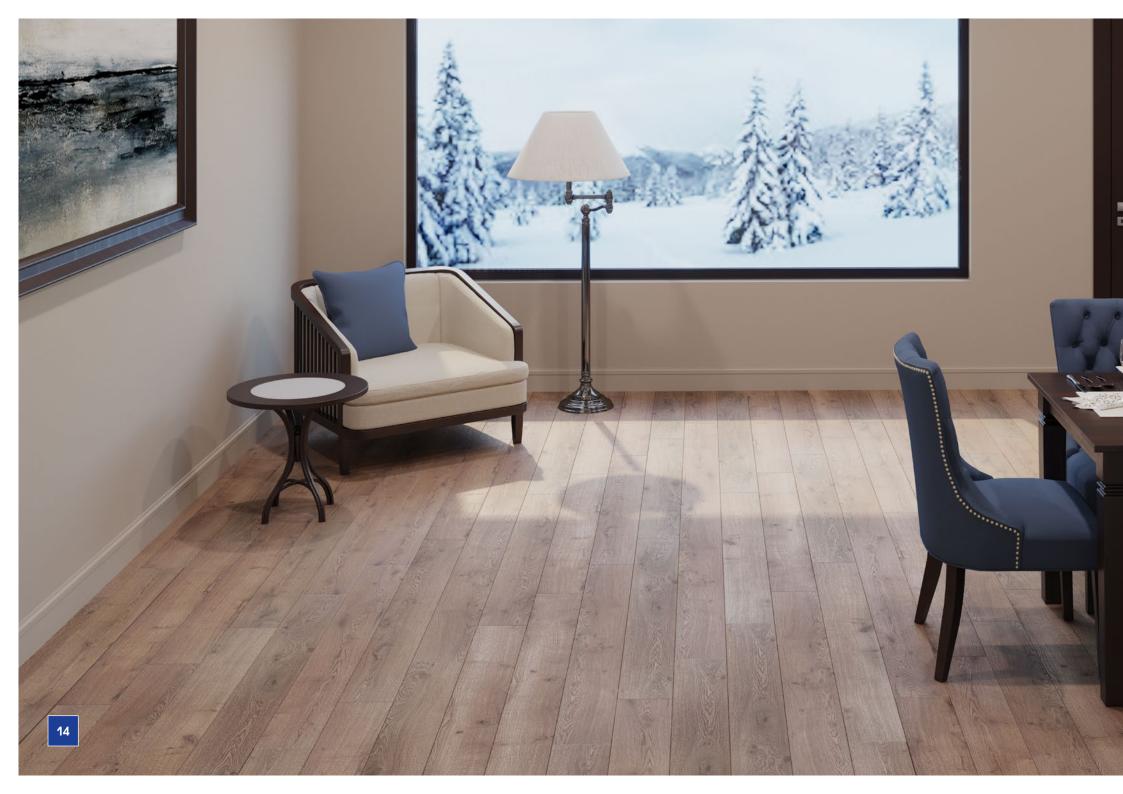


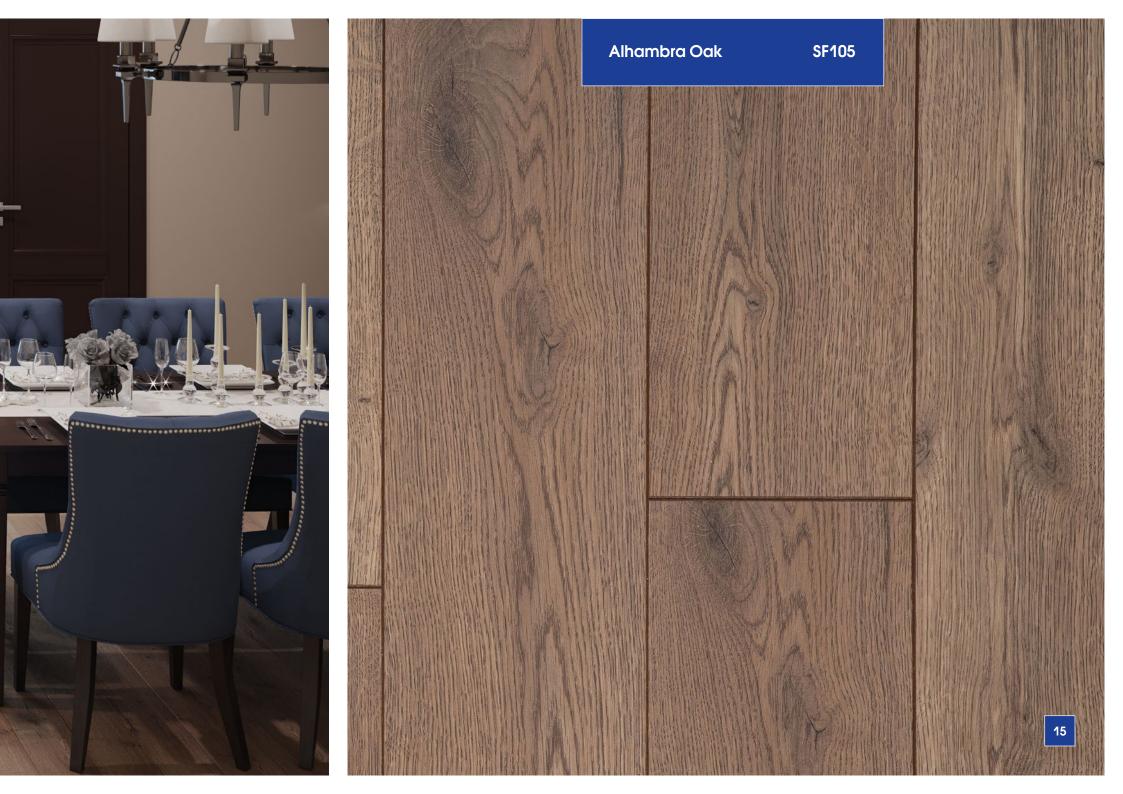


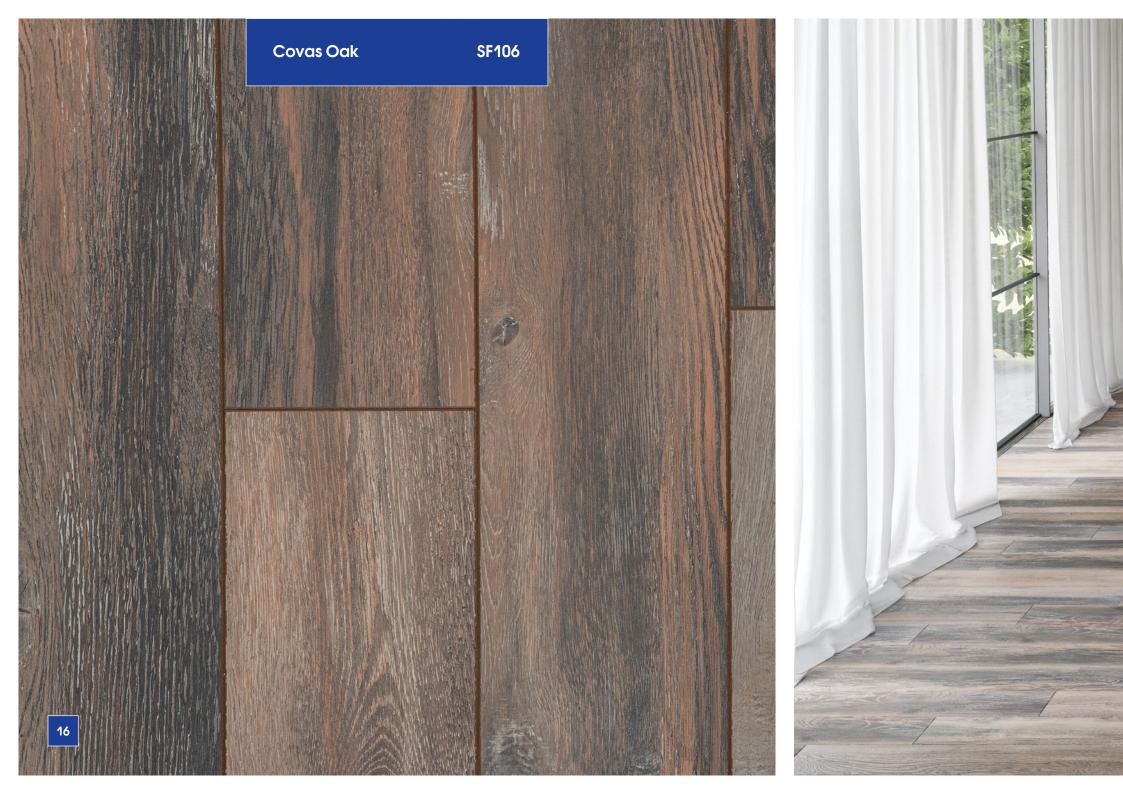




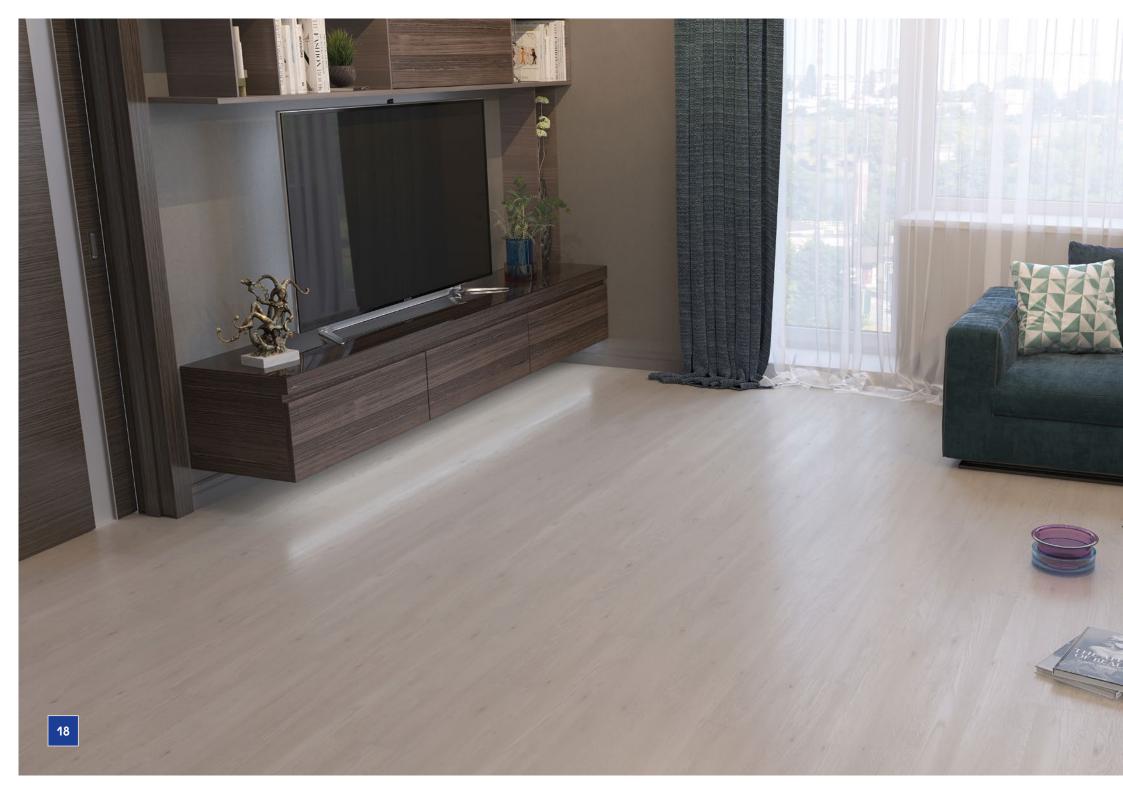

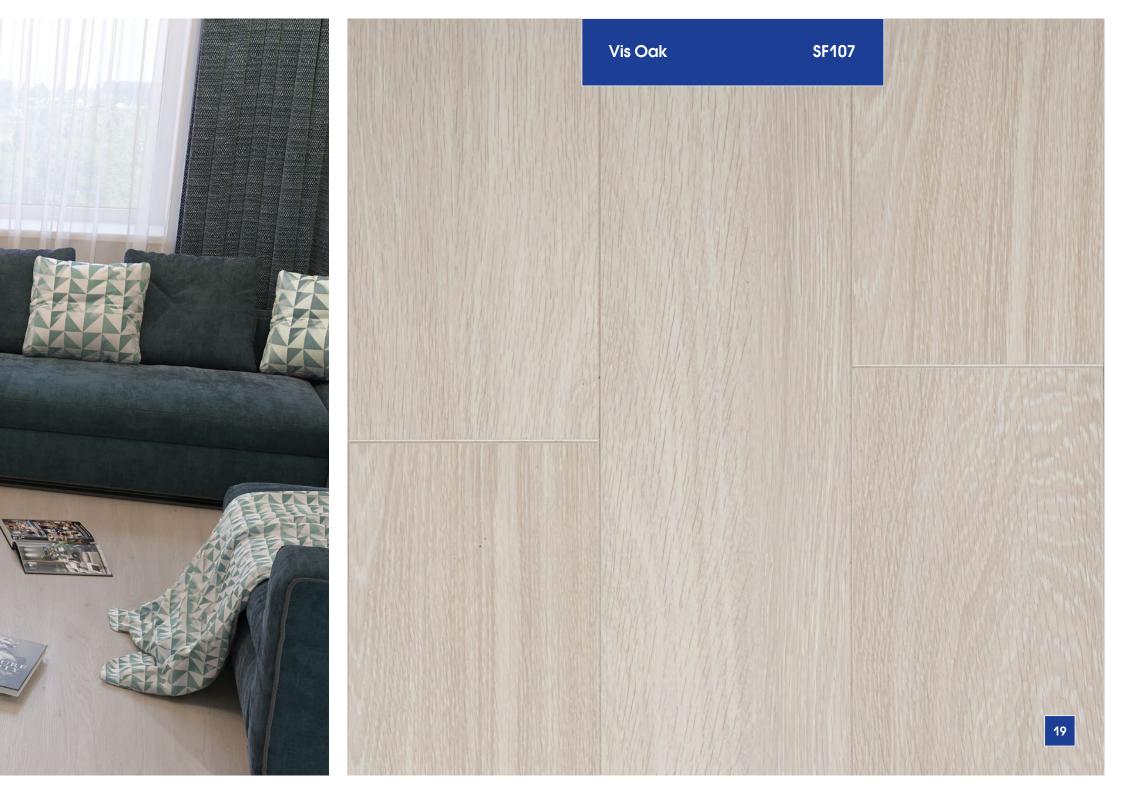

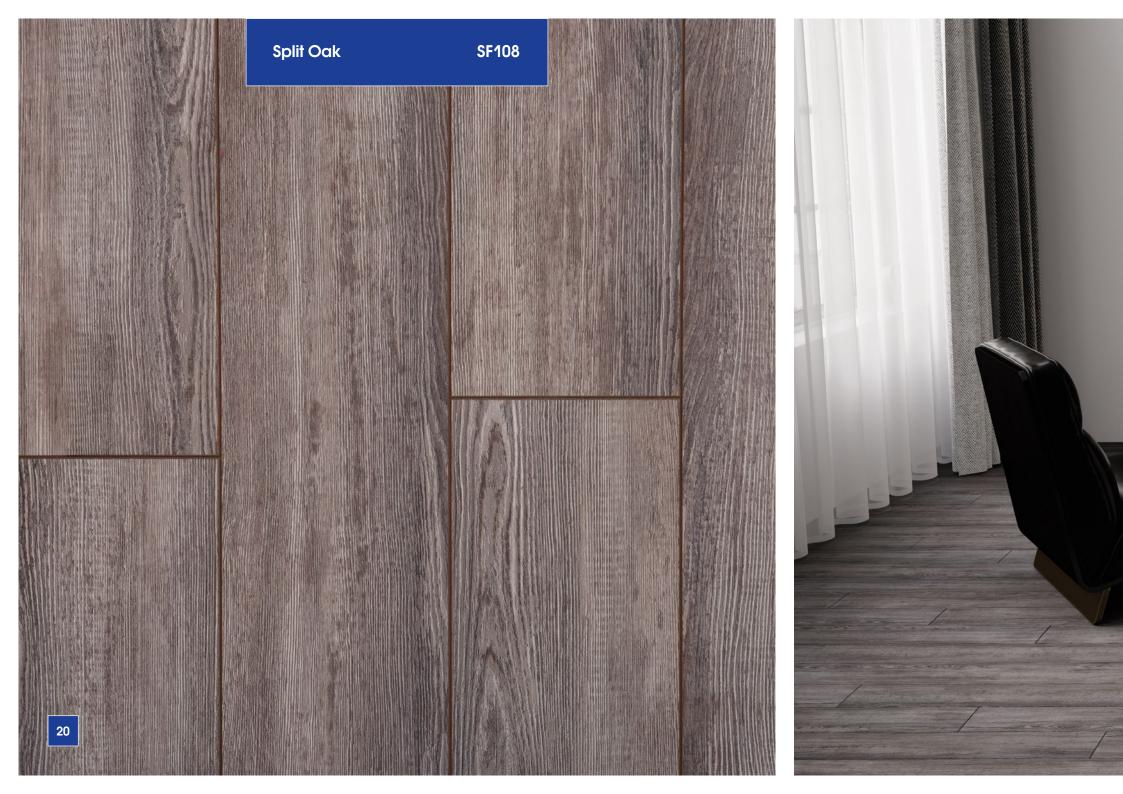




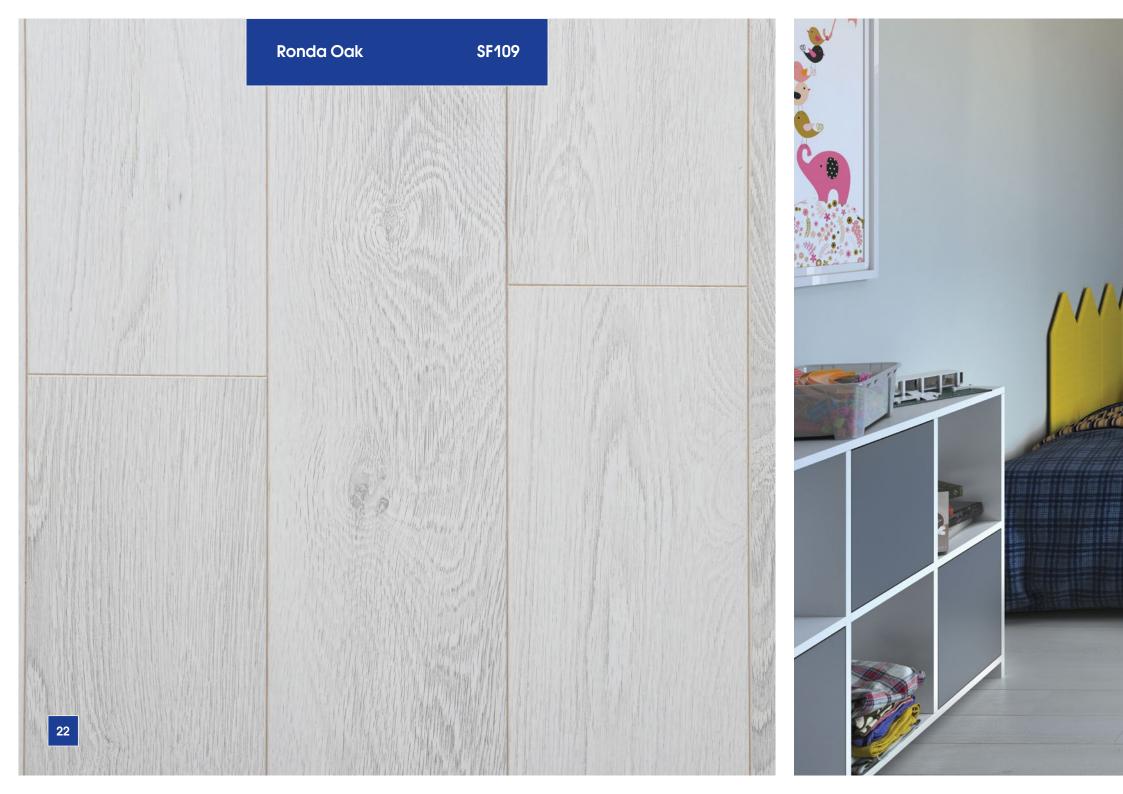







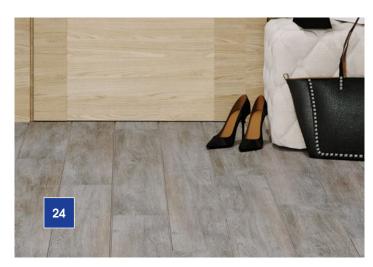















Bevel sign



Scratch-resistant laminate



Product packaging cannot be used for food products, including their storage



Certificate of the suitability of materials and products for use in construction on the territory of the Republic of Belarus

Award "100 Best Goods of the Russian Federation"



Resistance to light. The color and gloss do not change when exposed to sunlight.



Sign of the European Packaging Recycling and Disposal Standard (20-corrugated cardboard)



Wear resistance when moving furniture



Maximum temperature of the underfloor heating system must not exceed 28° <sup>c</sup>



Kastamonu uses a patented licensed technology of the connecting click



Shockproof High resistance to various mechanical damages



Certificate of conformity certifying compliance with requirements of Federal Law No. 123 «Technical Regulations on Fire Safety Requirements»



Resistance to high temperatures (for example, unextinguished cigarette)



Efi class - fire hazard classification of flooring materials



Environmentally friendly



Antistatic (does not attract dust)



Hygienic, does not require special care, easy-to-clean, just sweep or wipe with a mop.



E1 class - guarantees low formaldehyde content in the plate material



Glue-free system for assembling and disassembling of the click



Good thermal conductivity. Compatible with the «heated floors» system



Stain-resistant



DL class - guarantees the absence of pentachlorophenol in the finished product



High-density fiberboard (HDF)



Non-slip flooring class



Confirmation of availability of IMS certificates certifying compliance with standarts of EN ISO 9001, EN ISO 14001, OHSAS 18001, registration numbers of certificates and name of the certification authority having issued the certificate









Installation instructions





KASTAMONU MARKETING AND TRADE LLC 117638, Russia, Moscow, Odesskaya street, 2 block A, Business center «Lotus»

Tel: +7 495 785 77 30

e-mail: sales@keas.ru

## **FACTORY**

KASTAMONU INTERGRATED WOOD INDUSTRY LLC 423600, Russian Federation, Tatarstan Republic, Elabuga district, SH-3 Street (SEZ Alabuga territory), building 3/3

Tel: +7 85557 5 31 00

e-mail: info@keas.ru

www.kastamonu.ru