

FLOORPAN

BLUE 33^{CLASS} 8^{MM} 

Living better is easy!

 **kastamonu**

FLOORPAN

BLUE 33^{CLASS} 8^{MM}



Specifications

Board dimensions	1380 x 193 x 8 mm 54 1/3 x 7 3/5 x 23/73 in
Floor area per pack.....	2,131 m ² 22 43/46 sq. ft
Number of boards per pack.....	8 pcs
Pack weight	15 kg 33 2/29 lb
Number of packs on pallet	60 pcs
Gross weight of pallet	915 kg 2017 5/22 lb
Application class.....	33
Bevel.....	4V
Lock system.....	UNICLIC
Surface structure	T (Rustic)




Due to the technical features of the flooring the decor images in this catalog may vary slightly from the decor of the actual laminate flooring.

«Simplicity is genius»,

This is what we say about things that can easily change our lives for the better. We are used to having refrigerators, running water and fountain pens, things that were innovations in their day, and which changed our daily lives. Today transforming your interior with laminate flooring can be as simple as using a vacuum cleaner. Lighters, toothbrushes, cameras, these are all things, just like Floorpan laminate, which have proven that change for the better can be found in simplicity.

To inspire you to make positive changes to your life, we offer you our special collections: a collection of stories about useful inventions, and the KASTAMONU Floorpan laminate flooring collection. We believe that living better is easy and we are here to help you achieve this.

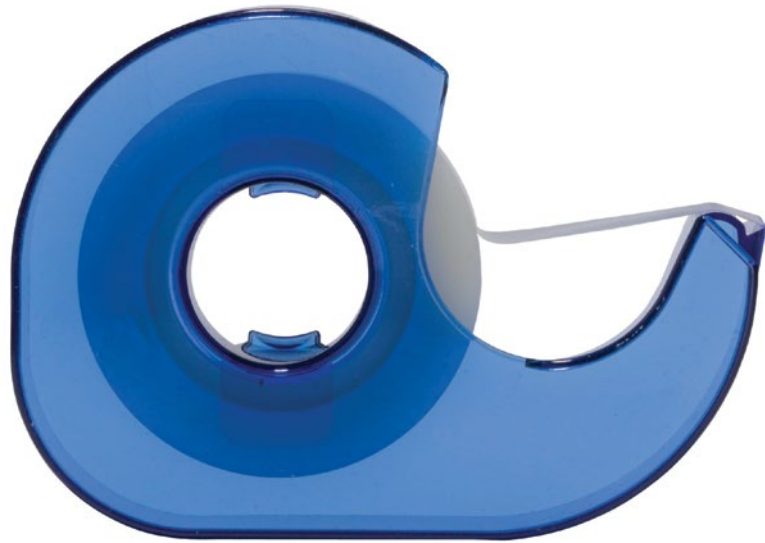

Splendidly fixed


After years of military service, tape, which was previously used to protect ammunition from the effects of water, suddenly gained popularity among the civilian population. If anything, anywhere broke, tore off, smashed or was in need of repair, tape would come straight to the rescue.





Canyon Oak Black

FP37

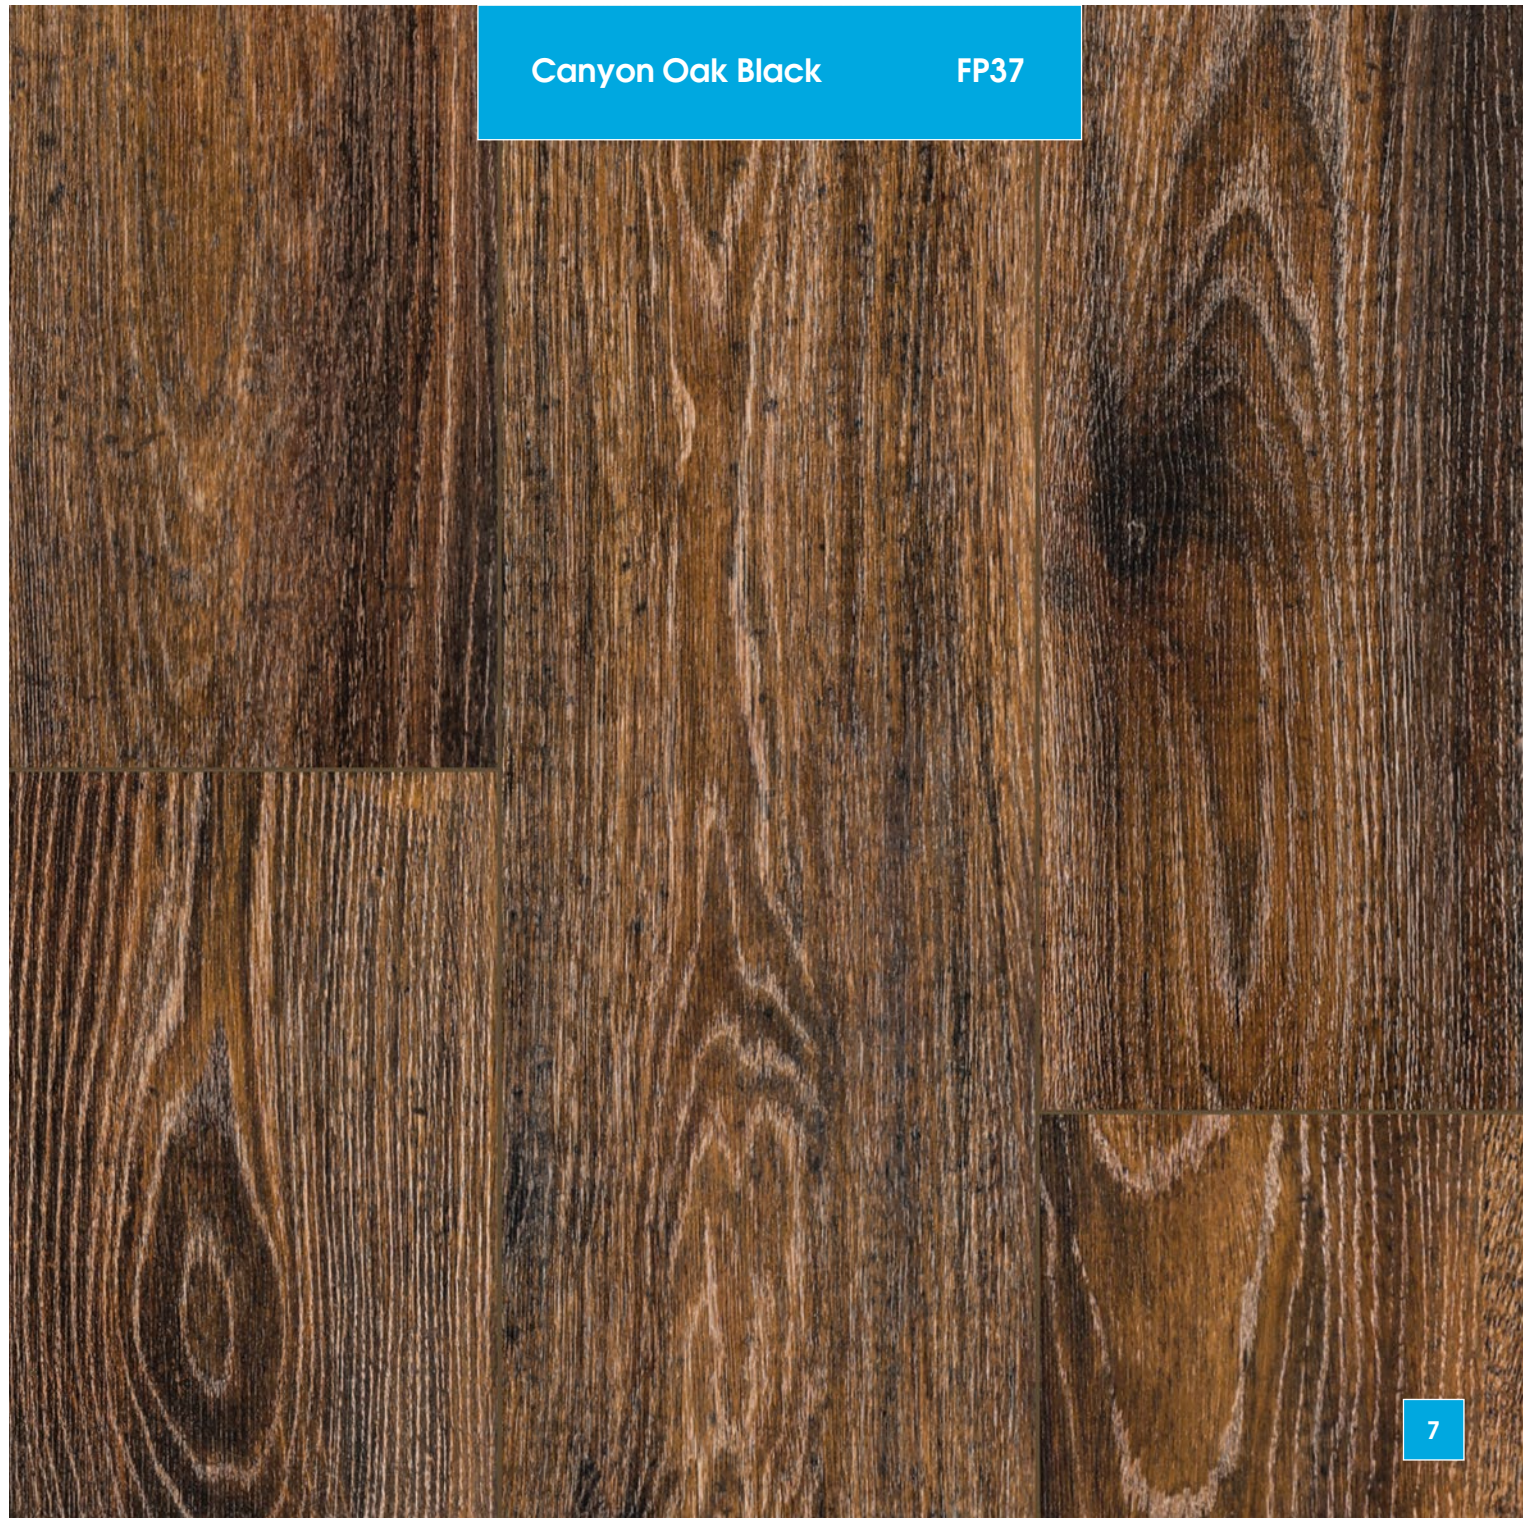

Luanda Oak

FP38










Palermo Oak Classic

FP40

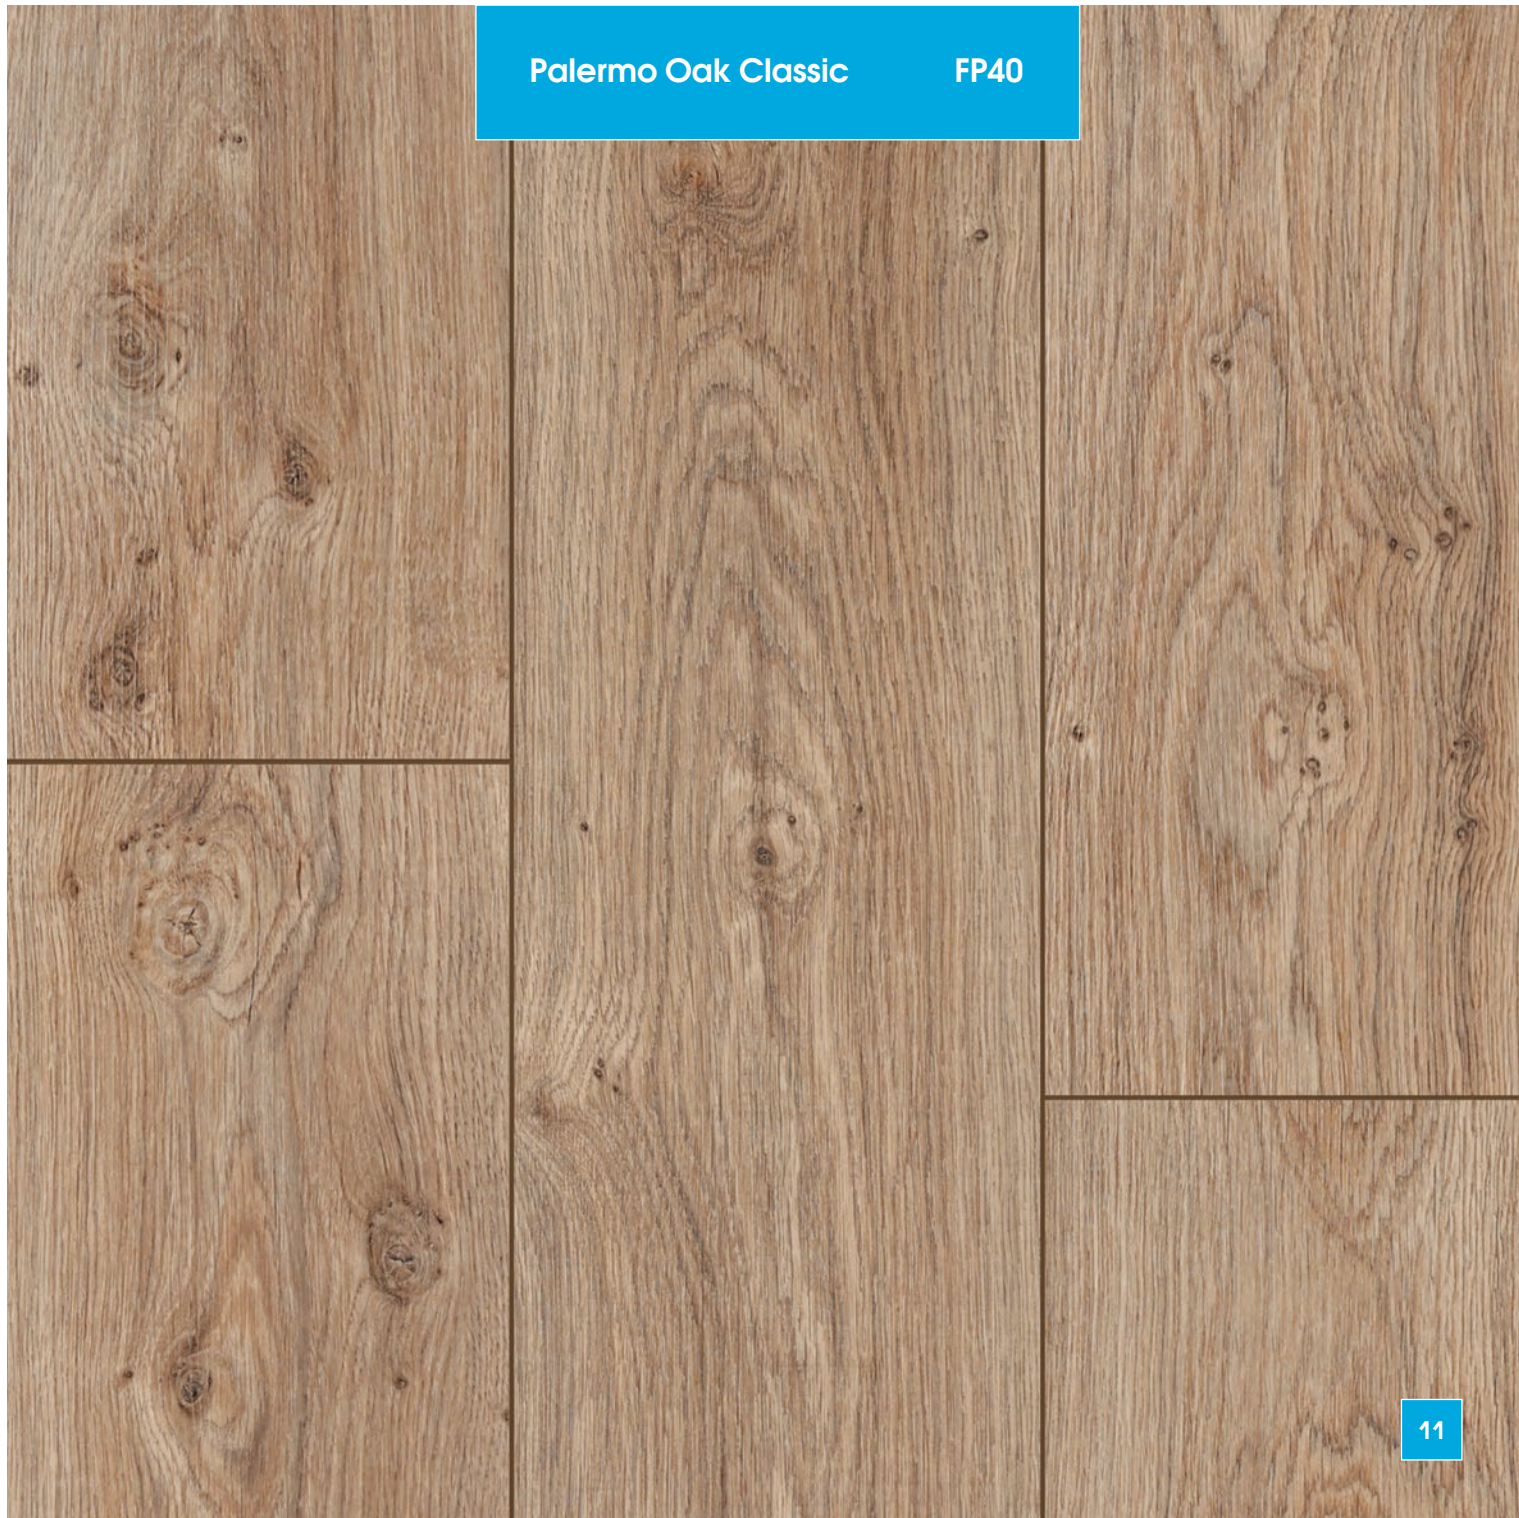

Everest Oak Light

FP44










Harold Oak

FP700

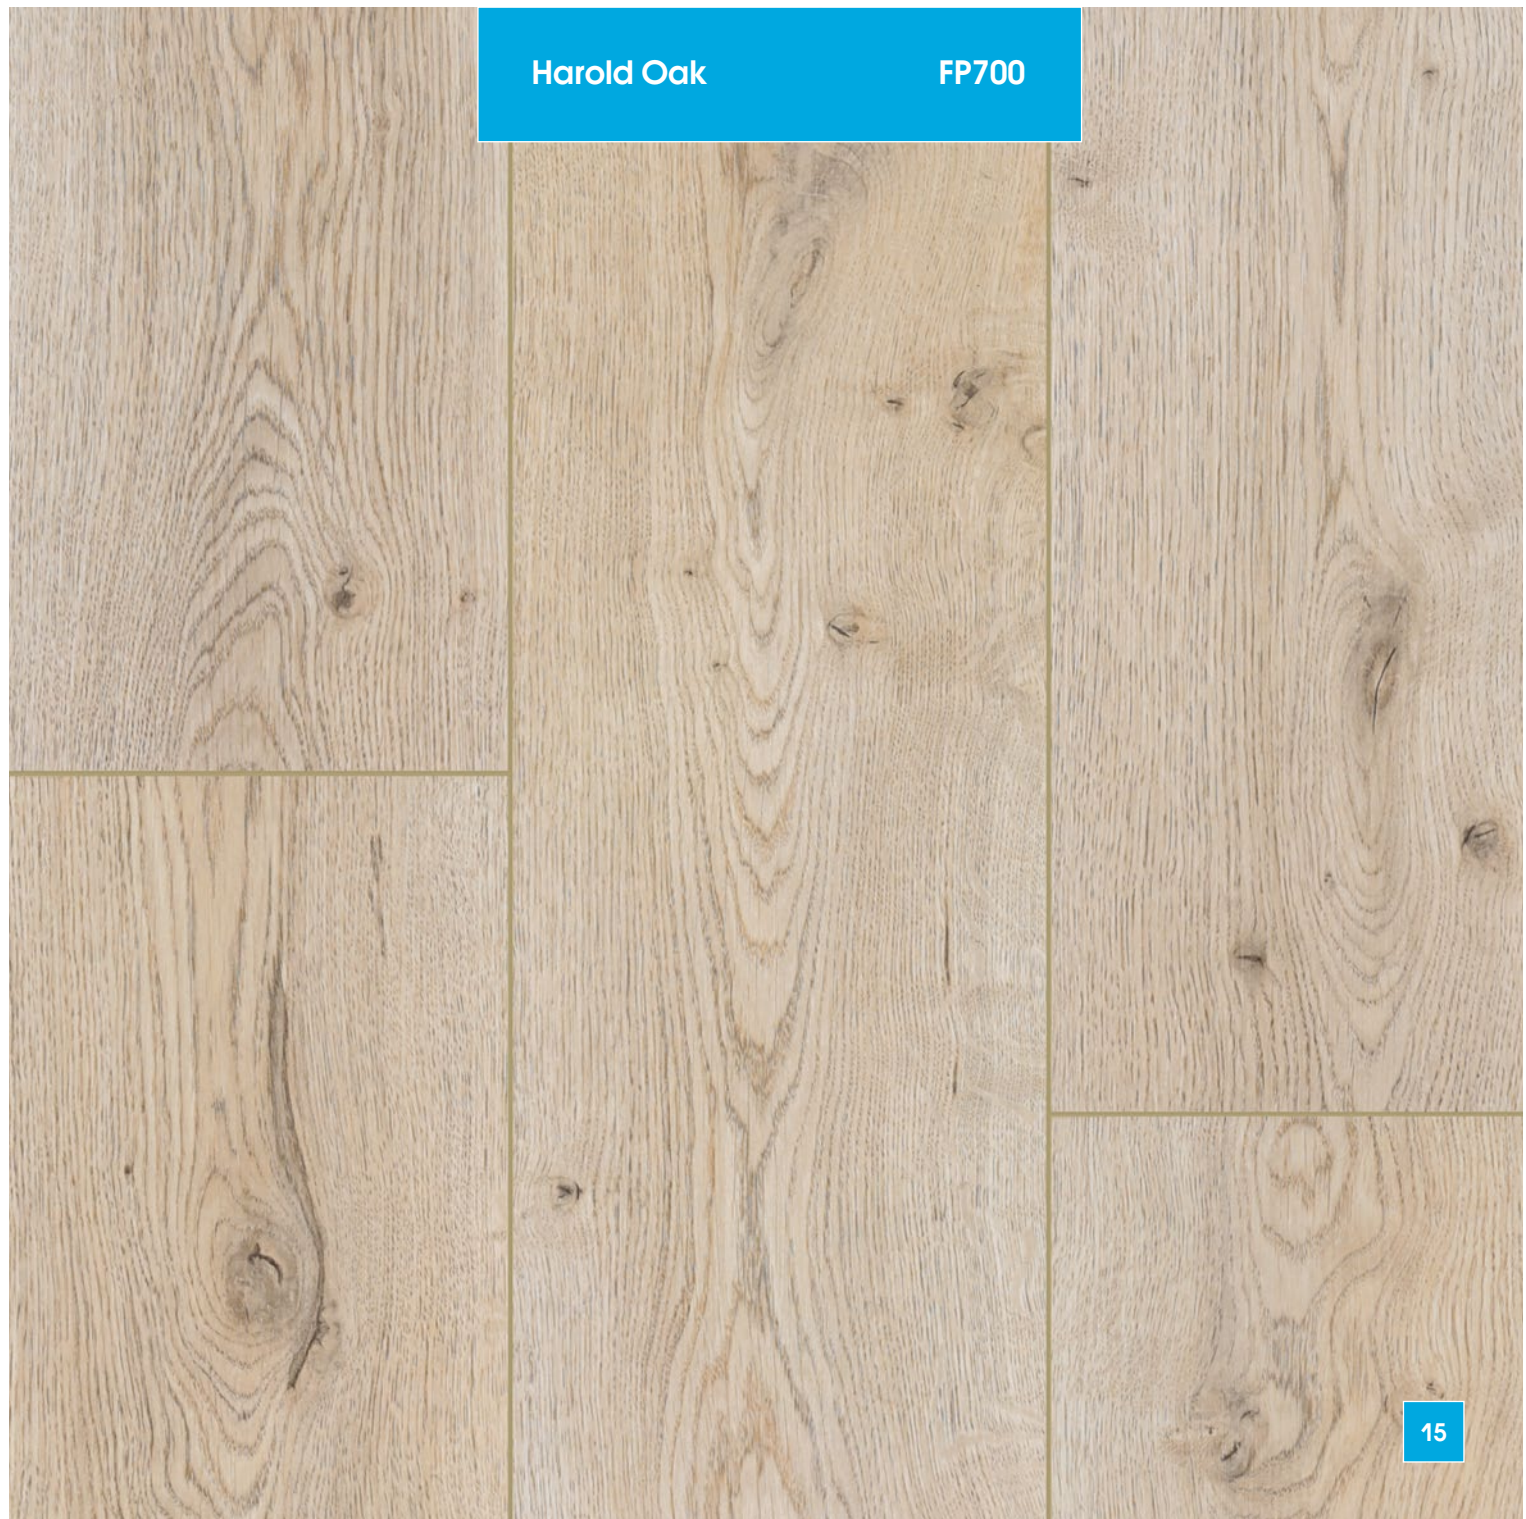

Sydney Oak

FP702











Allen Oak

FP703

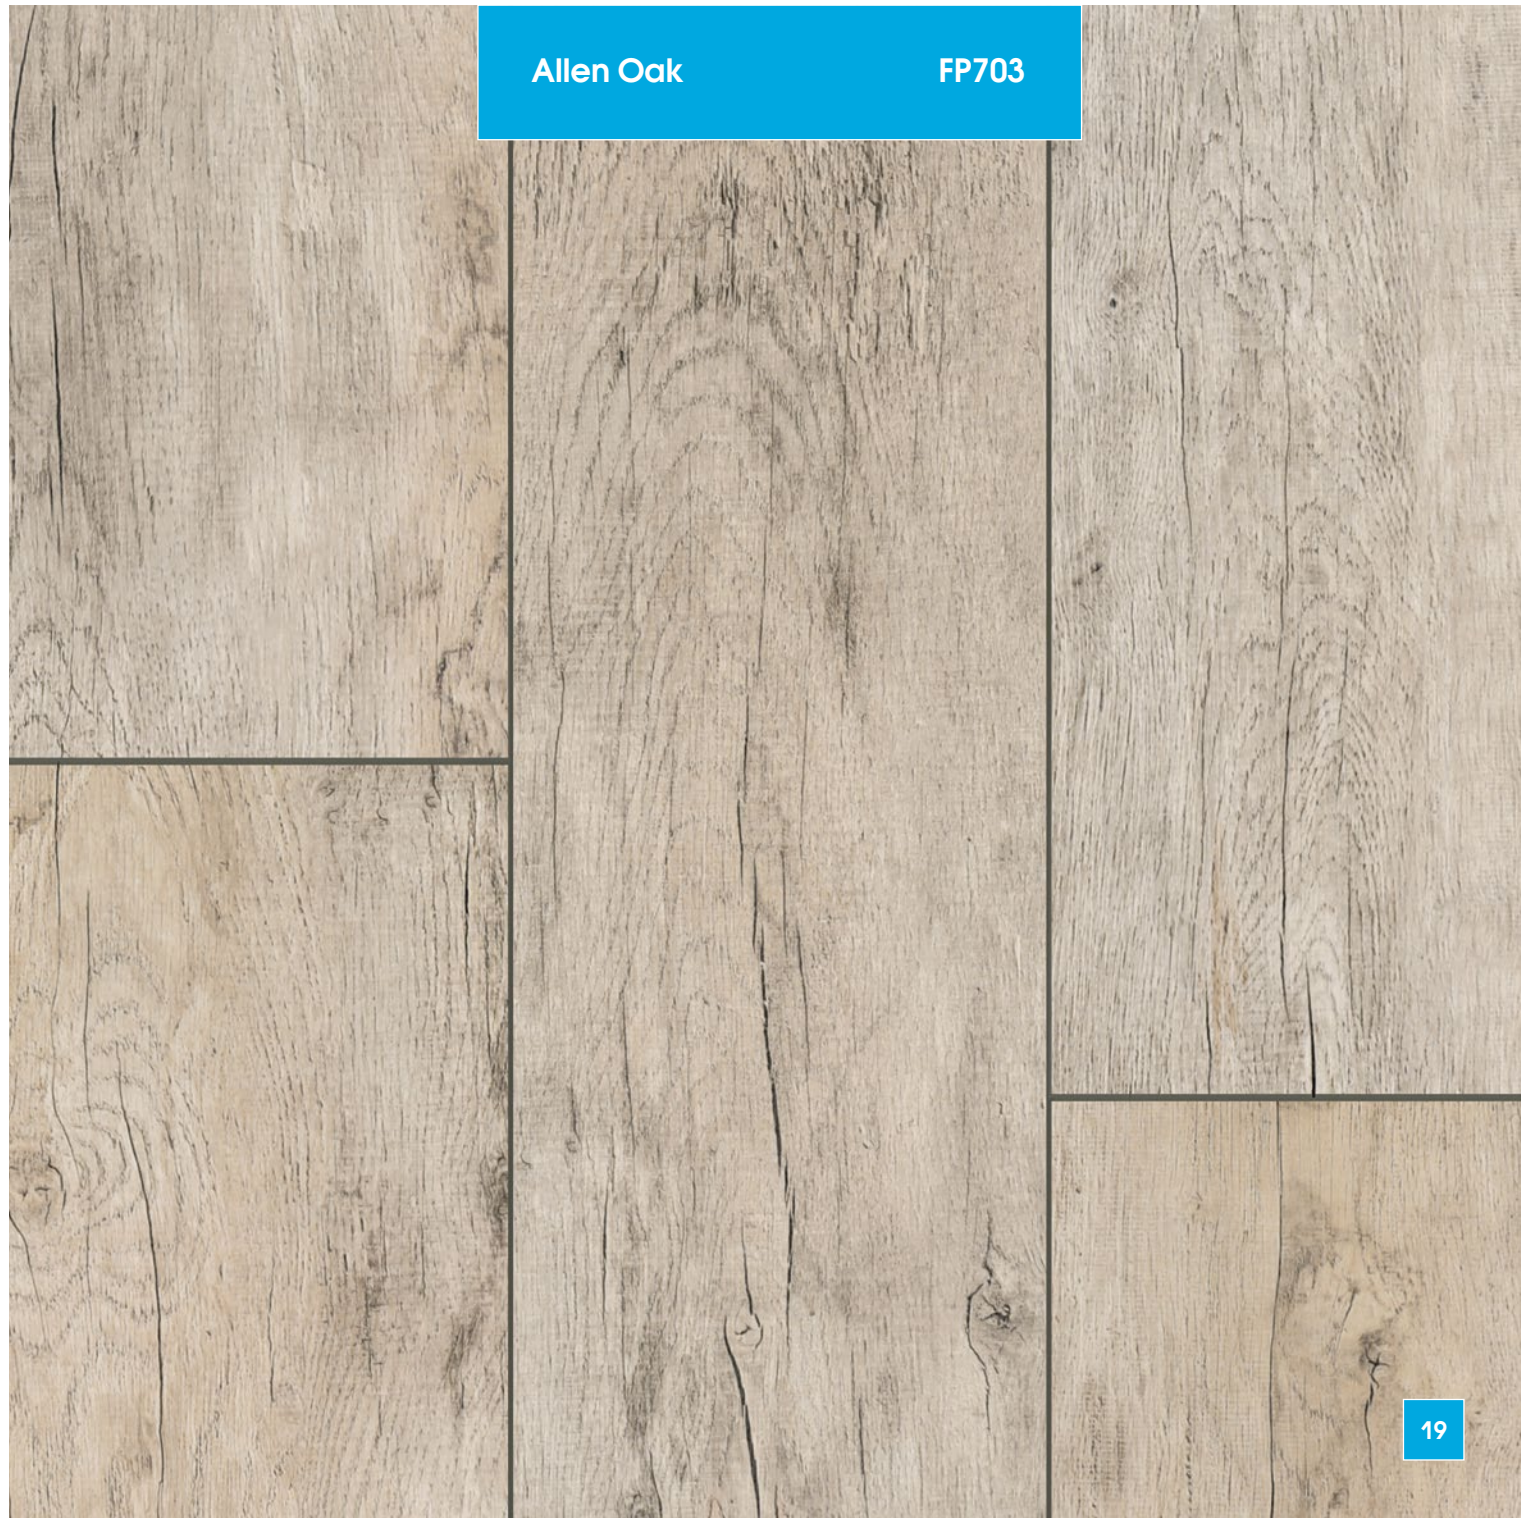

Kasador Oak

FP704

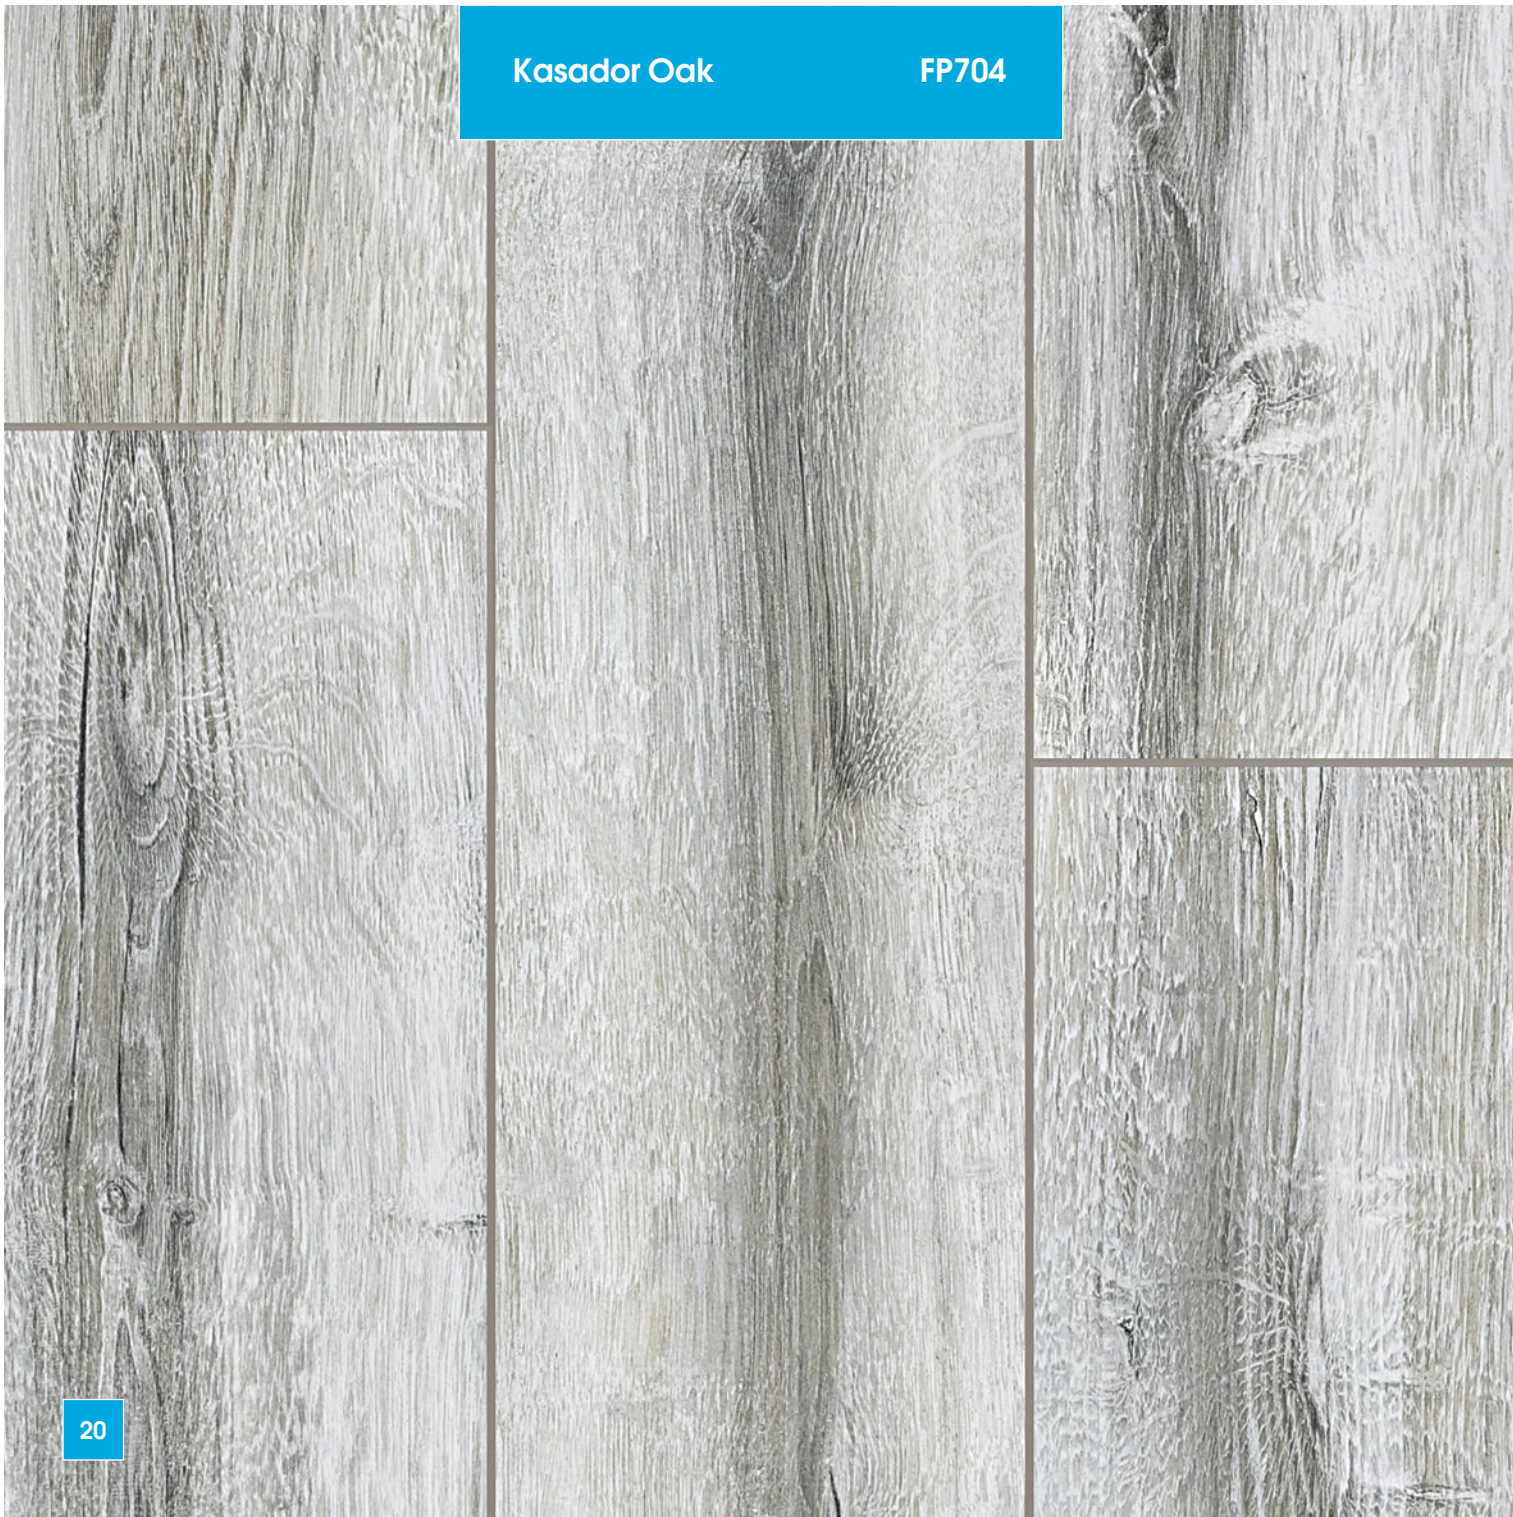








Greymouth Oak

FP705

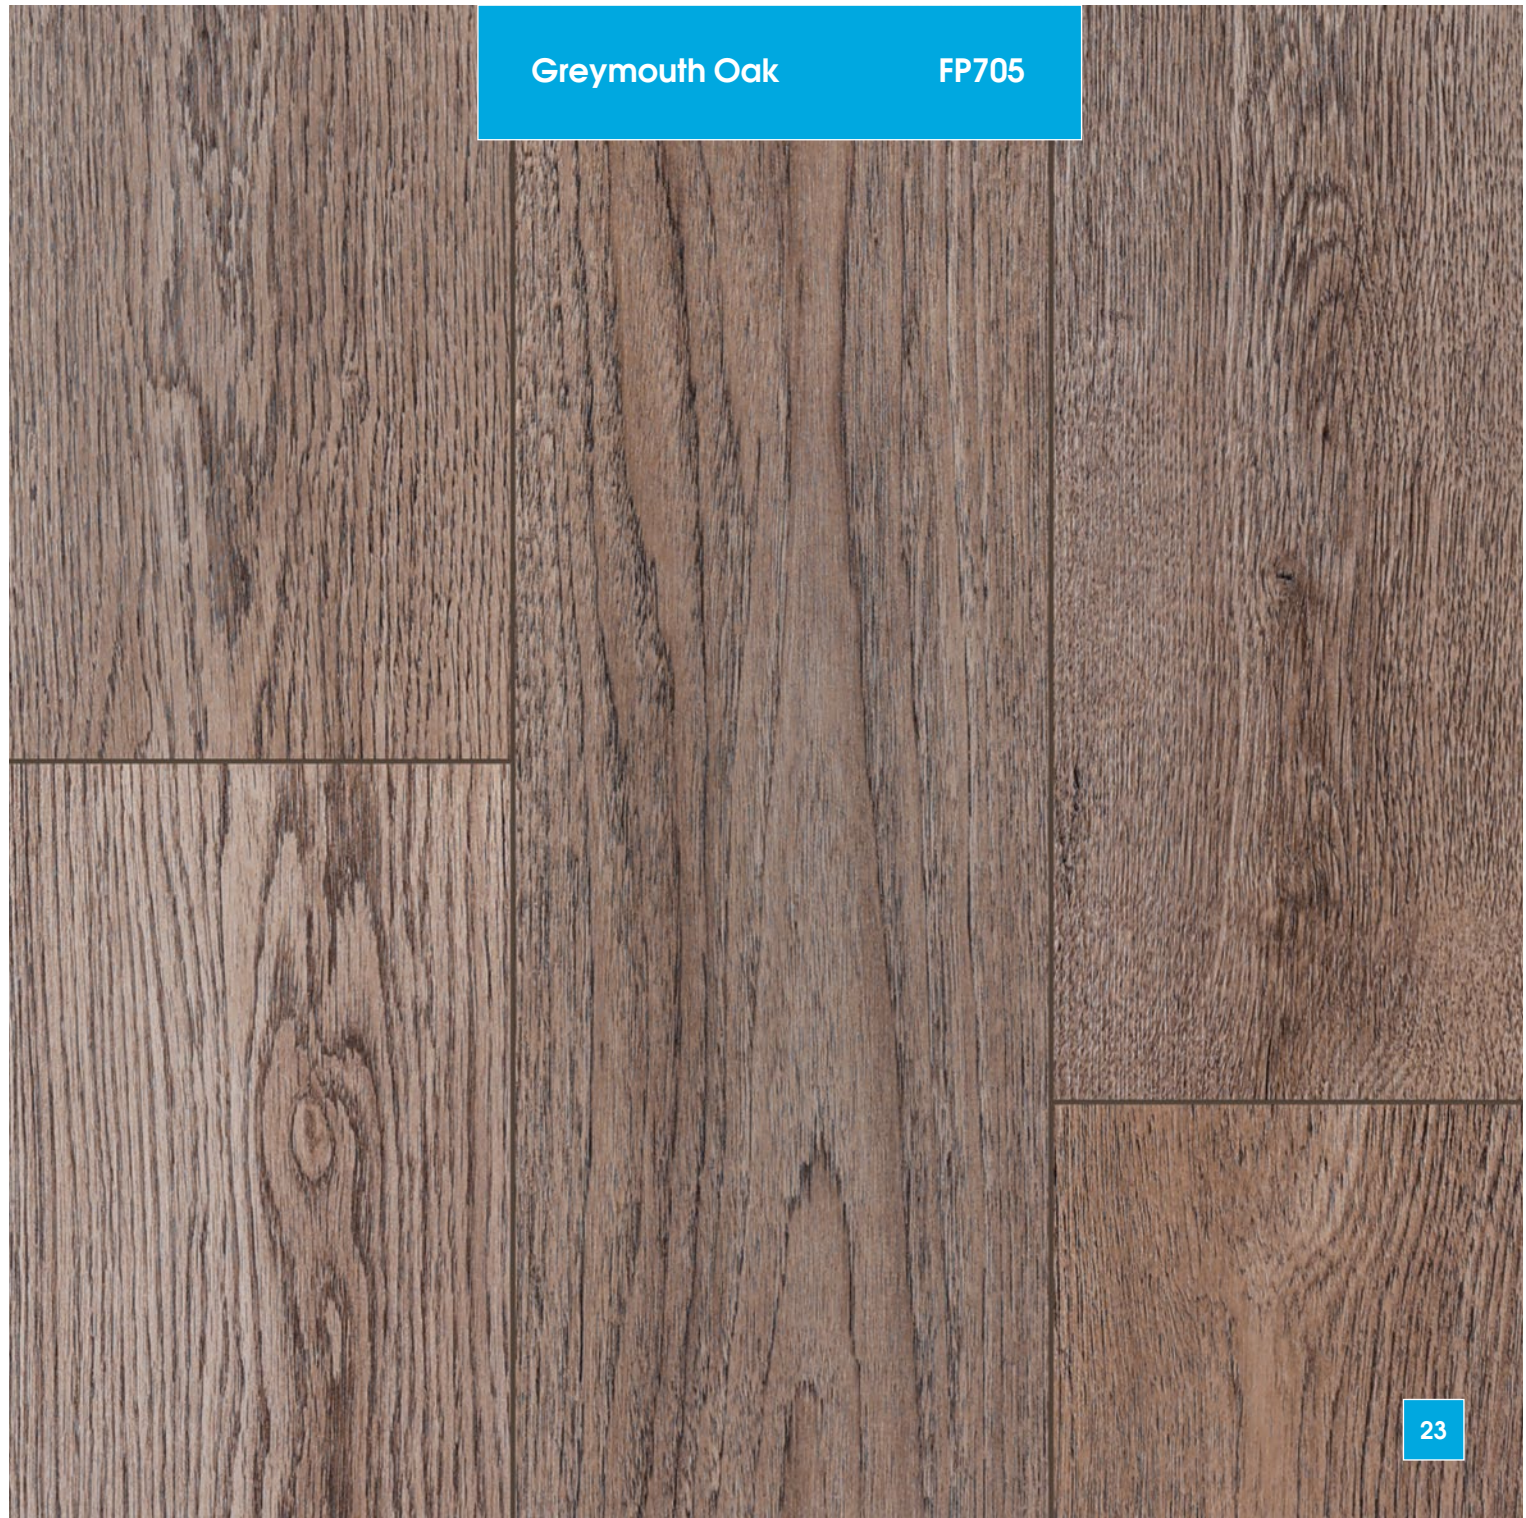

Melbourne Oak

FP706










Northland Oak

FP707

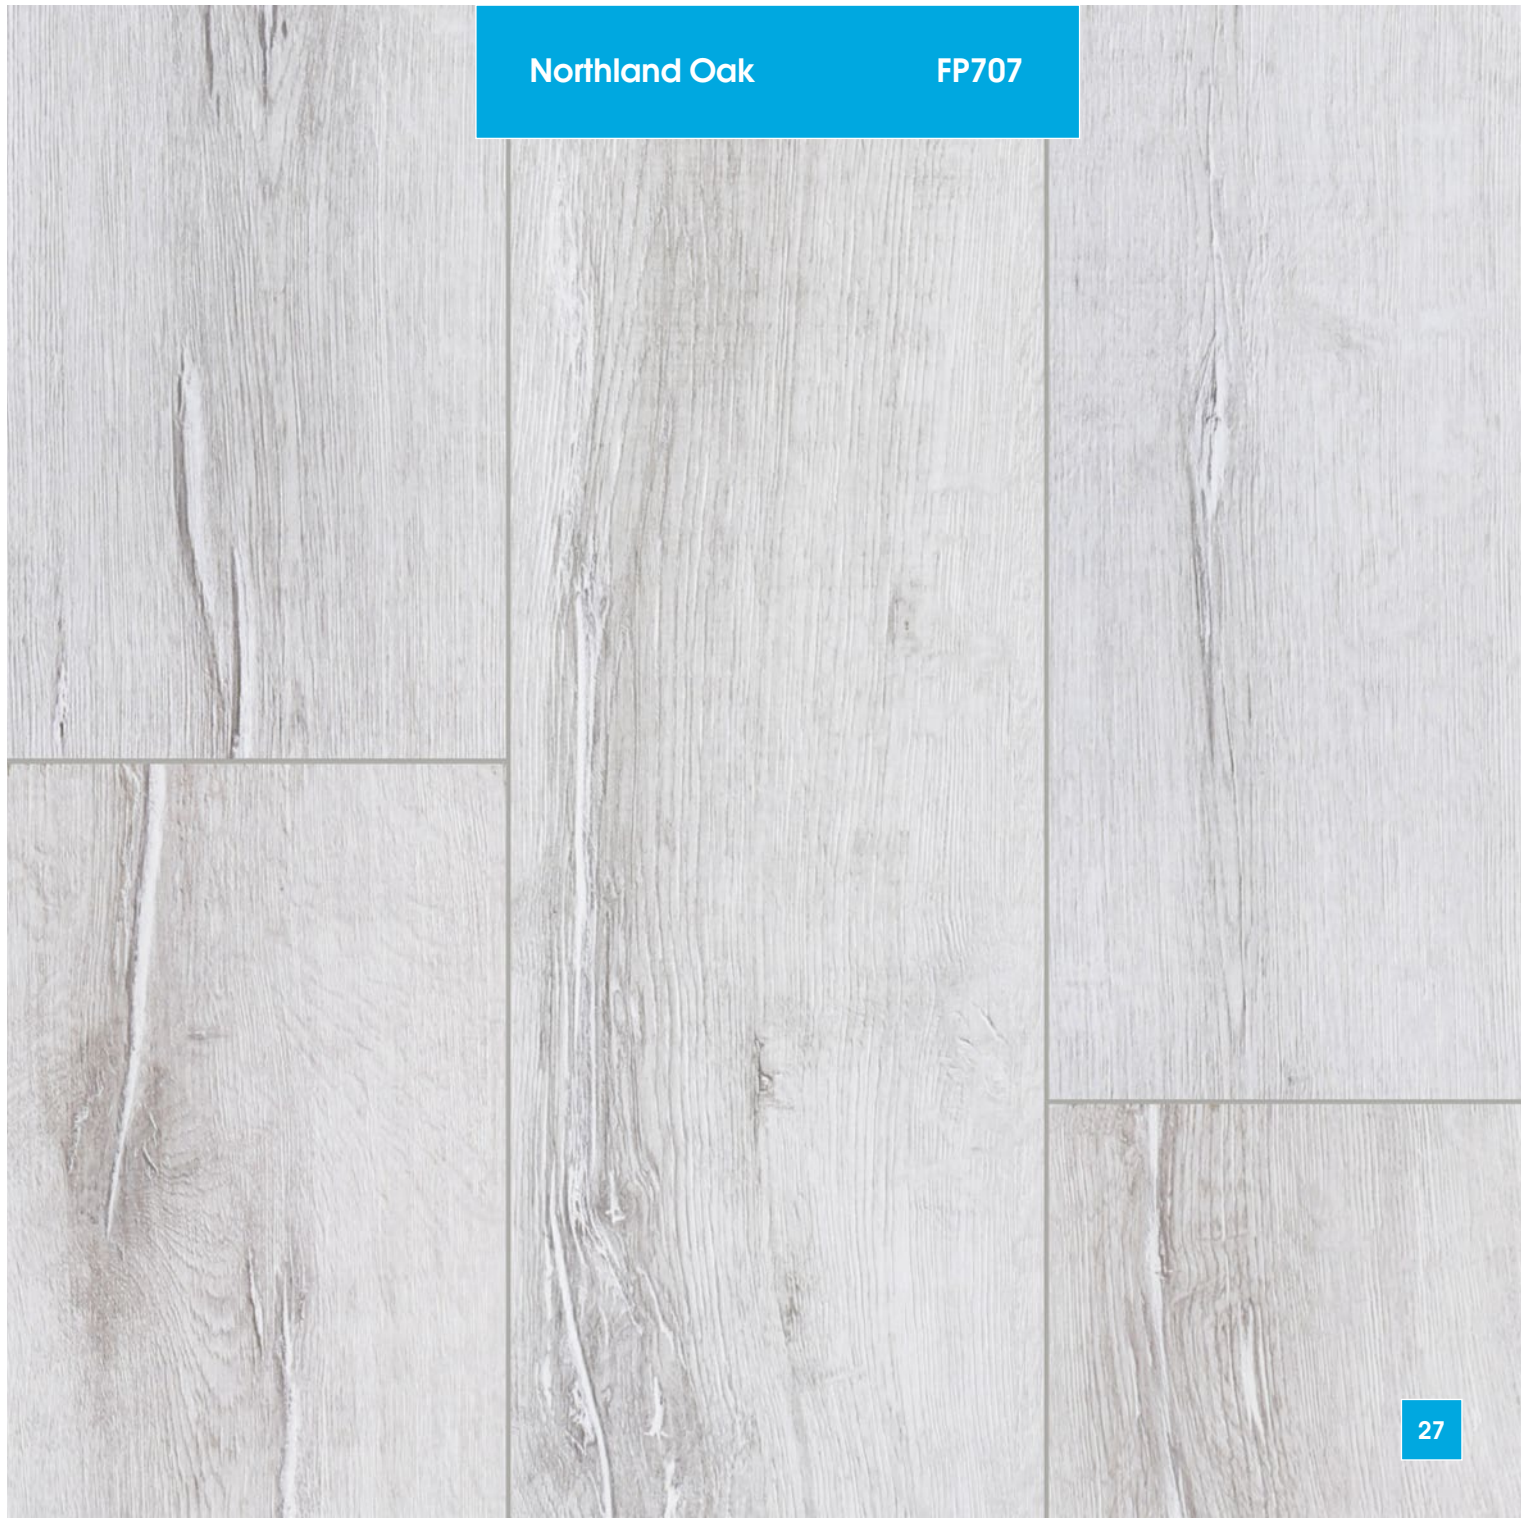

Medeo Oak

FP708





BLUE 33 CLASS 8 MM 



Canyon Oak Black FP37




Luanda Oak FP38



Palermo Oak Classic FP40



Everest Oak Light FP44

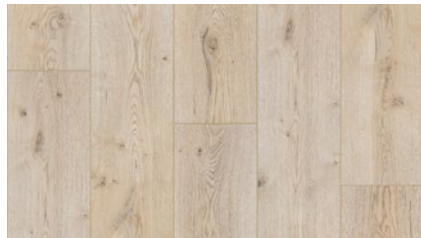


Harold Oak FP700




Sydney Oak FP702




Allen Oak FP703

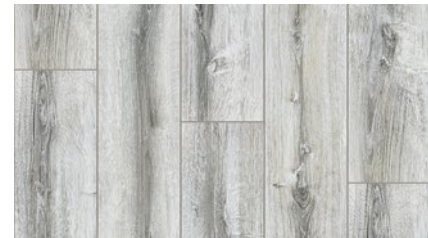


Kasador Oak FP704

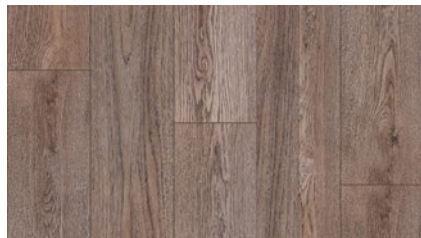

Greymouth Oak FP705

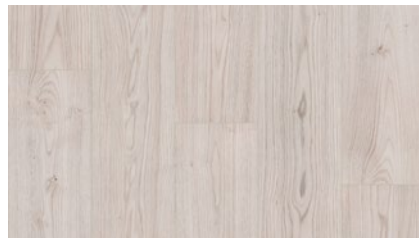



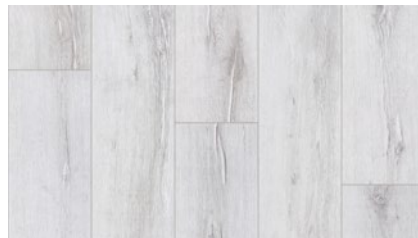

























Melbourne Oak FP706



Northland Oak FP707



Medeo Oak FP708

 Bevel sign	 Scratch-resistant laminate	 Product packaging cannot be used for food products, including their storage	 Certificate of the suitability of materials and products for use in construction on the territory of the Republic of Belarus
 Award "100 Best Goods of the Russian Federation"	 Resistance to light. The color and gloss do not change when exposed to sunlight.	 Sign of the European Packaging Recycling and Disposal Standard (20-corrugated cardboard)	 Wear resistance when moving furniture
 Maximum temperature of the underfloor heating system must not exceed 28° C	 Kastamonu uses a patented licensed technology of the connecting click	 Shockproof High resistance to various mechanical damages	 Certificate of conformity certifying compliance with requirements of Federal Law No. 123 «Technical Regulations on Fire Safety Requirements»
 Resistance to high temperatures (for example, unextinguished cigarette)	 Efi class - fire hazard classification of flooring materials	 Environmentally friendly	 Antistatic (does not attract dust)
 Hygienic, does not require special care, easy-to-clean, just sweep or wipe with a mop.	 E1 class - guarantees low formaldehyde content in the plate material	 Glue-free system for assembling and disassembling of the click	 Good thermal conductivity. Compatible with the «heated floors» system
 Stain-resistant	 DL class - guarantees the absence of pentachlorophenol in the finished product	 High-density fiberboard (HDF) base	 Non-slip flooring class
 TUV AUSTRIA CERTIFIED TUV AUSTRIA CERT GMBH	EN ISO 9001 20 100 5413770846 EN ISO 14001 20 104 5413770849 OHSAS 18001 20 116 1413770844	Confirmation of availability of IMS certificates certifying compliance with standards of EN ISO 9001, EN ISO 14001, OHSAS 18001, registration numbers of certificates and name of the certification authority having issued the certificate	
 CE 2016 Dop: L-001 EN 14041:2004/AC:2006 KOSI JERUJINI INTEGRATED FLOOR INDUSTRY LLC 423650, Russian Federation, Tatarstan Republic, Berega Internet, 51st Street (BIZ Abbage territory), 64419 33			



Installation instructions

SALES OFFICE

KASTAMONU MARKETING AND TRADE LLC
117638, Russia, Moscow, Odesskaya street, 2 block A,
Business center «Lotus»

Tel: +7 495 785 77 30

e-mail: sales@keas.ru

FACTORY

KASTAMONU INTERGRATED WOOD INDUSTRY LLC
423600, Russian Federation, Tatarstan Republic, Elabuga district,
SH-3 Street (SEZ Alabuga territory), building 3/3

Tel: +7 85557 5 31 00

e-mail: info@keas.ru

www.kastamonu.ru