

FLOORPAN

EMERALD 33^{CLASS} 12^{MM} 

bridging nature and life



FLOORPAN

EMERALD 33^{CLASS} 12^{MM} 

Specifications

| | |
|---------------------------------|---|
| Board dimensions | 1380 x 193 x 12 mm 54 1/3 x 7 3/5 x 43/91 in |
| Floor area per pack..... | 1,864 m ² 20 3/44 sq. ft |
| Number of boards per pack..... | 7 pcs |
| Pack weight | 19 kg 41 87/98 lb |
| Number of packs on pallet | 44 pcs |
| Gross weight of pallet | 834 kg 1838 21/32 lb |
| Application class..... | 33 |
| Bevel..... | 4V |
| Lock system | UNICLIC |
| Surface structure | C (Country) V (Vintage) |



www.blauer-engel.de/uz176



Hygiene+
Klassifizierung nach DIN EN ISO 14644-1:2011

Due to the technical features of the flooring the decor images in this catalog may vary slightly from the decor of the actual laminate flooring.

«Simplicity is genius»,

This is what we say about things that can easily change our lives for the better. We are used to having refrigerators, running water and fountain pens, things that were innovations in their day, and which changed our daily lives. Today transforming your interior with laminate flooring can be as simple as using a vacuum cleaner. Lighters, toothbrushes, cameras, these are all things, just like Floorpan laminate, which have proven that change for the better can be found in simplicity.


To inspire you to make positive changes to your life, we offer you our special collections: a collection of stories about useful inventions, and the KASTAMONU Floorpan laminate flooring collection. We believe that living better is easy and we are here to help you achieve this.



Unsurpassed accuracy

The first chronometer was invented 340 years ago by Galileo Galilei and Christiaan Huygens. The precision device with an average error of less than 5 seconds per day was vital to the Navy to correctly calculate the location of ships.

Today the best watchmakers are Swiss. Their current record chronometer error is 1/100th of a second per day for mechanical clocks and 1/1000th of a second per day for quartz clocks.

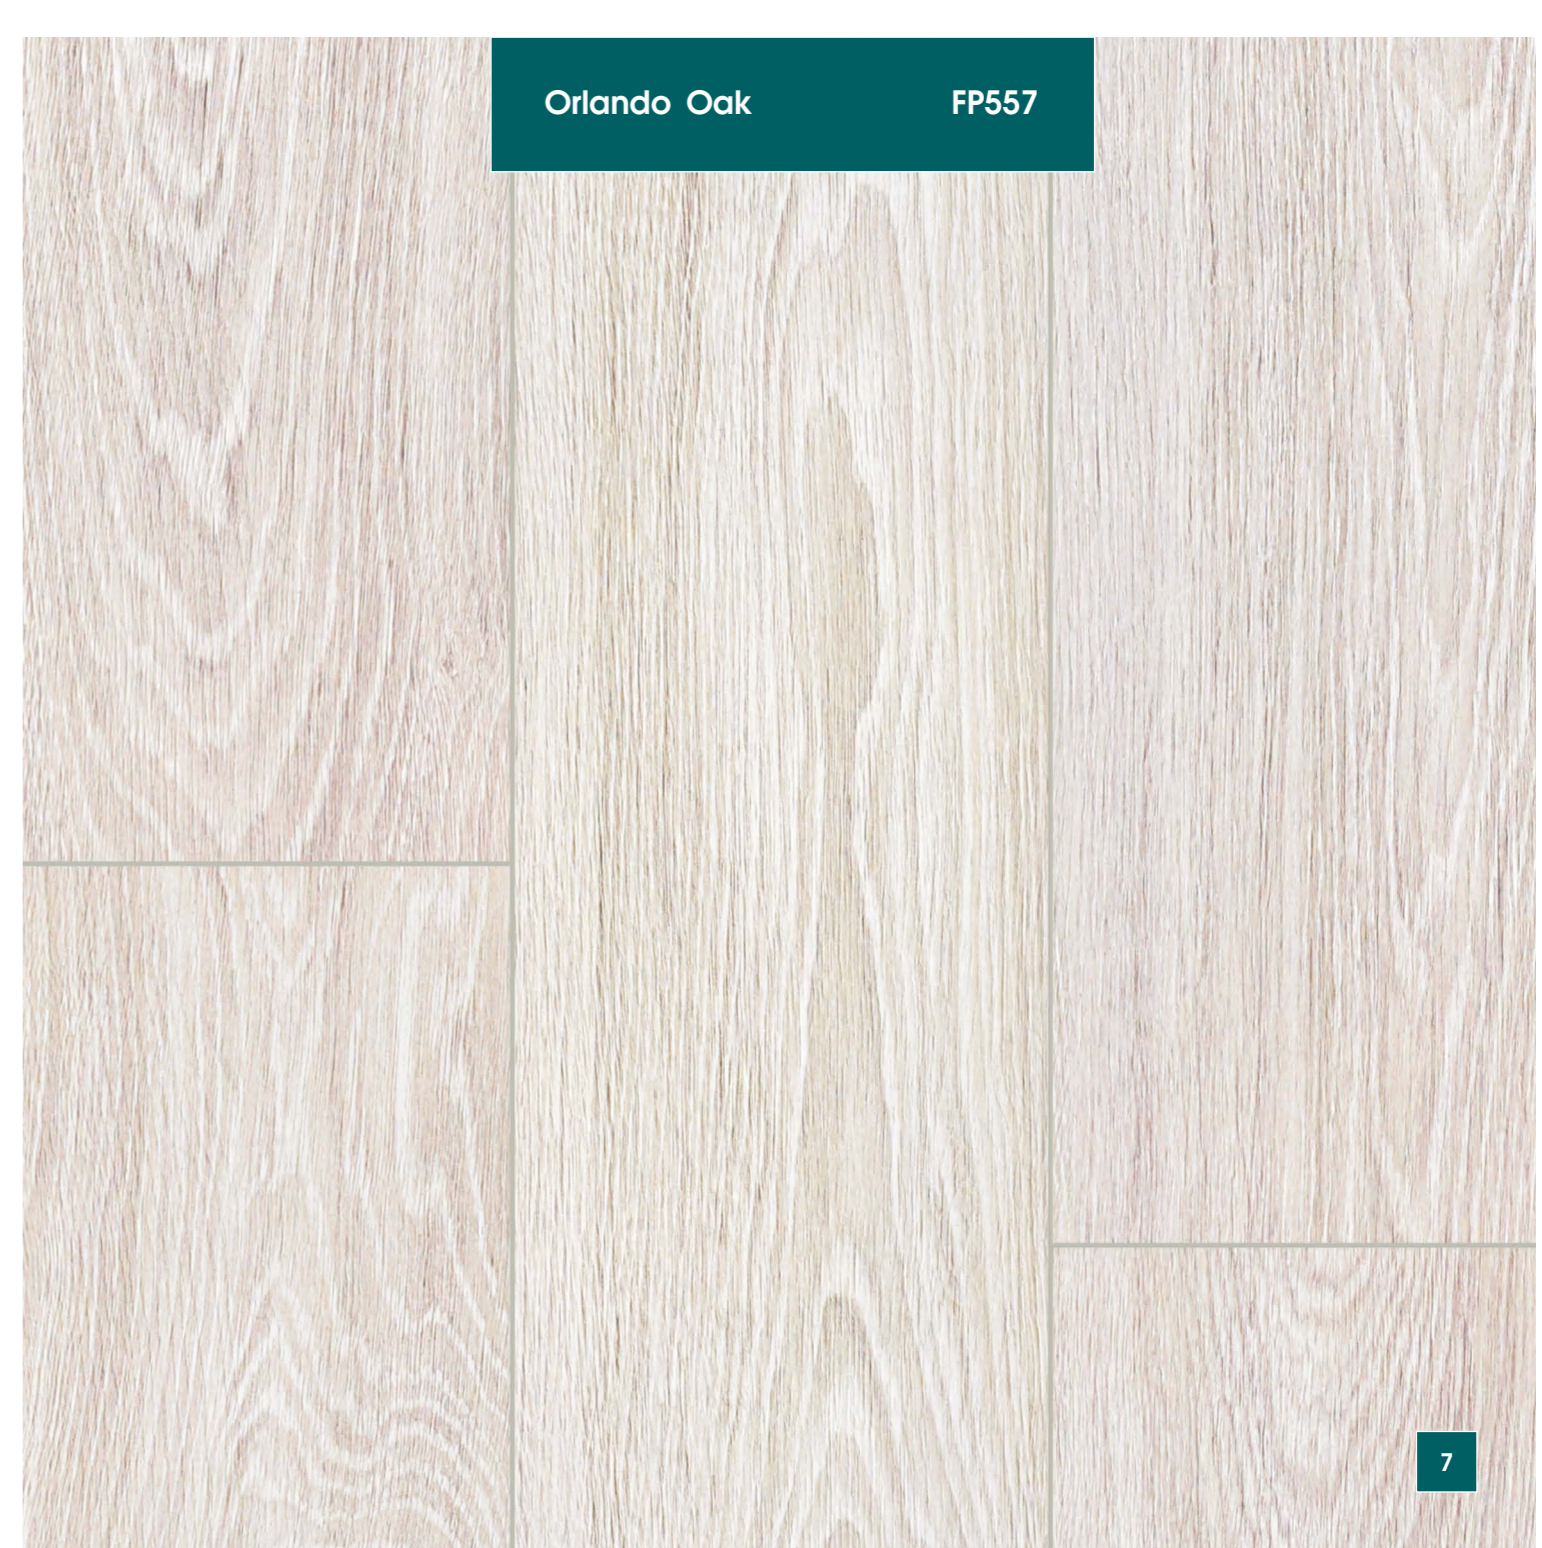

Orlando Oak

FP557

Montana Pine

FP558





Magellan Oak

FP559


Livingston Oak

FP561

12



13

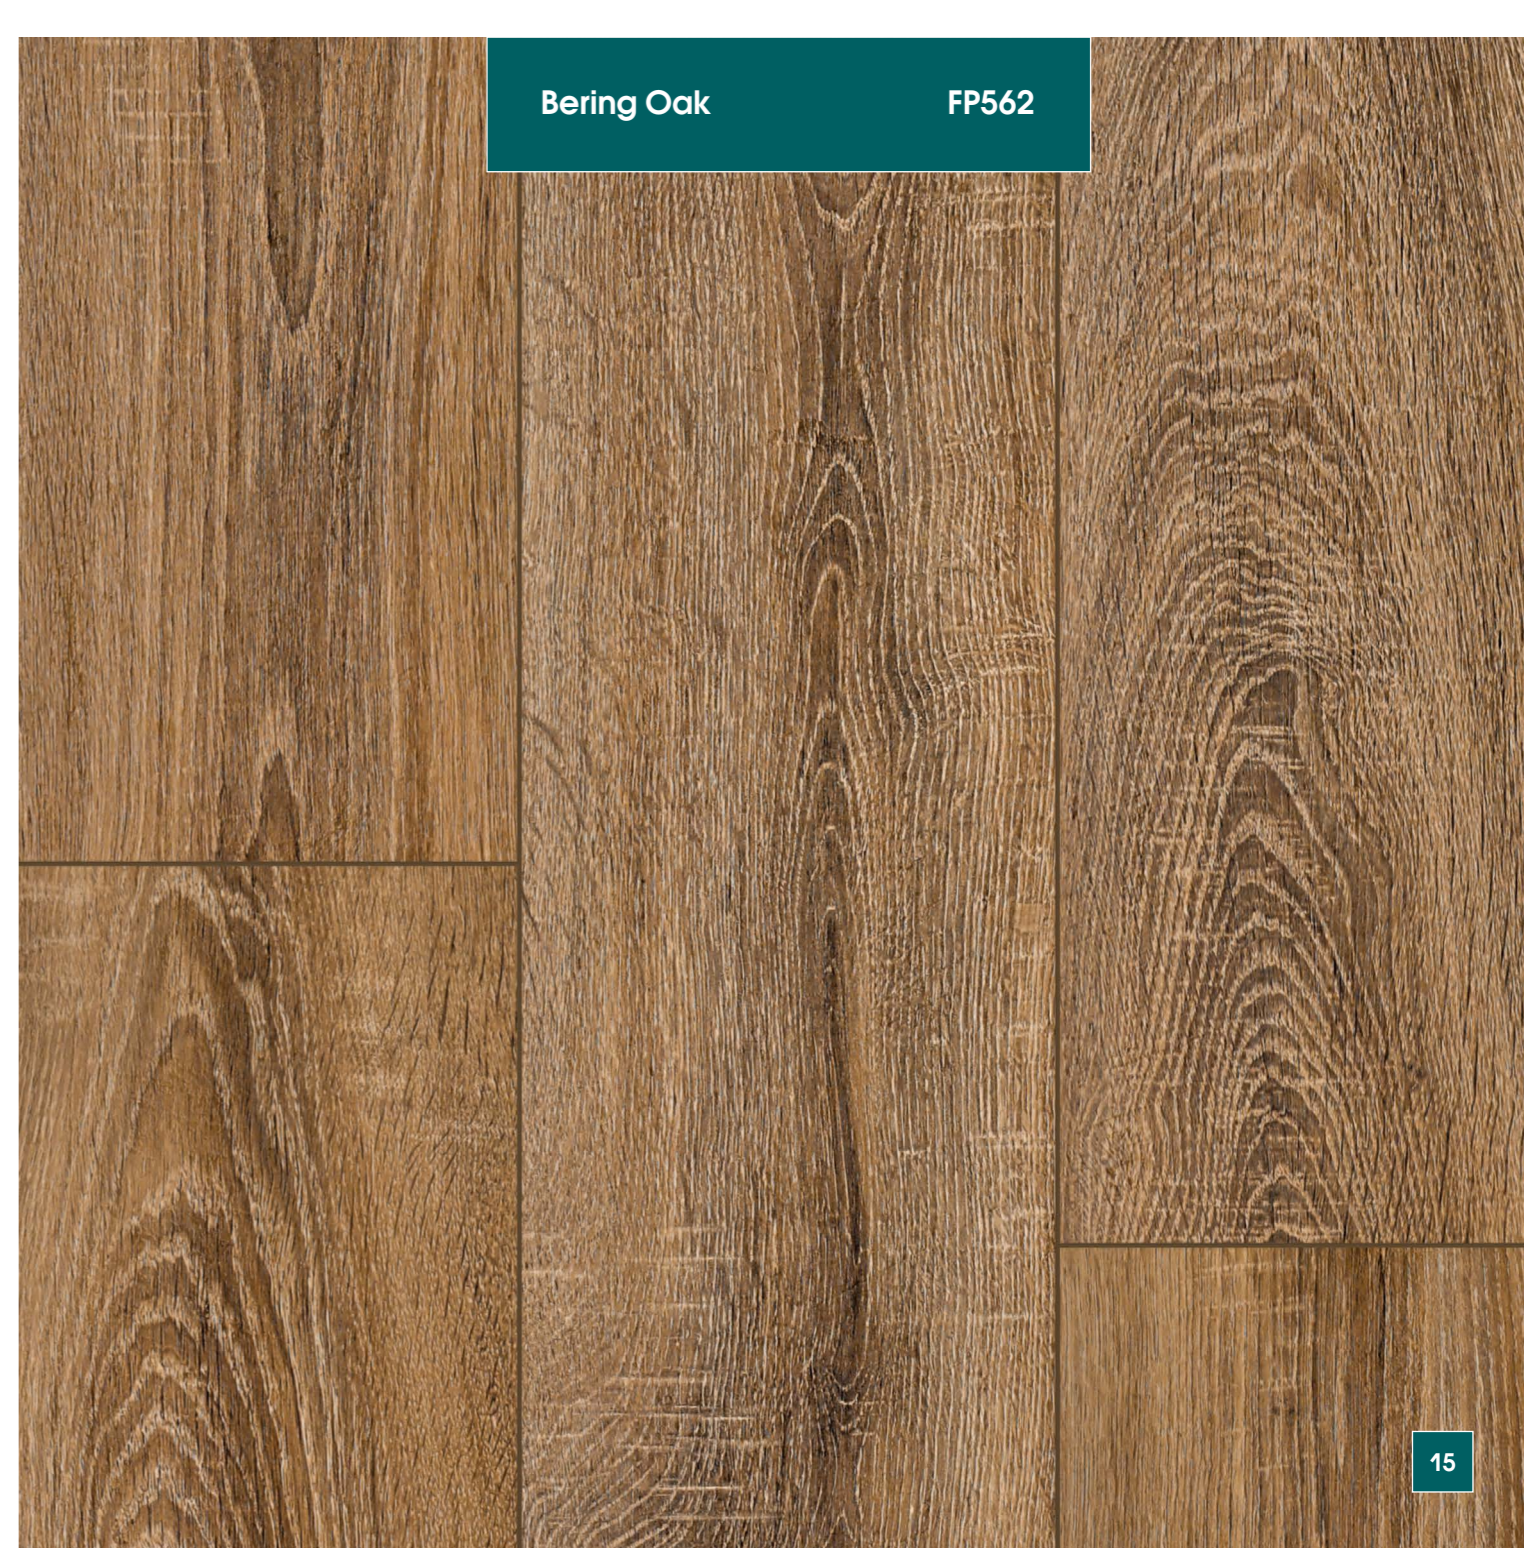

Bering Oak

FP562

Larsen Oak

FP568



Morgan Oak

FP569


Davis Oak

FP570



Cartier Oak

FP571

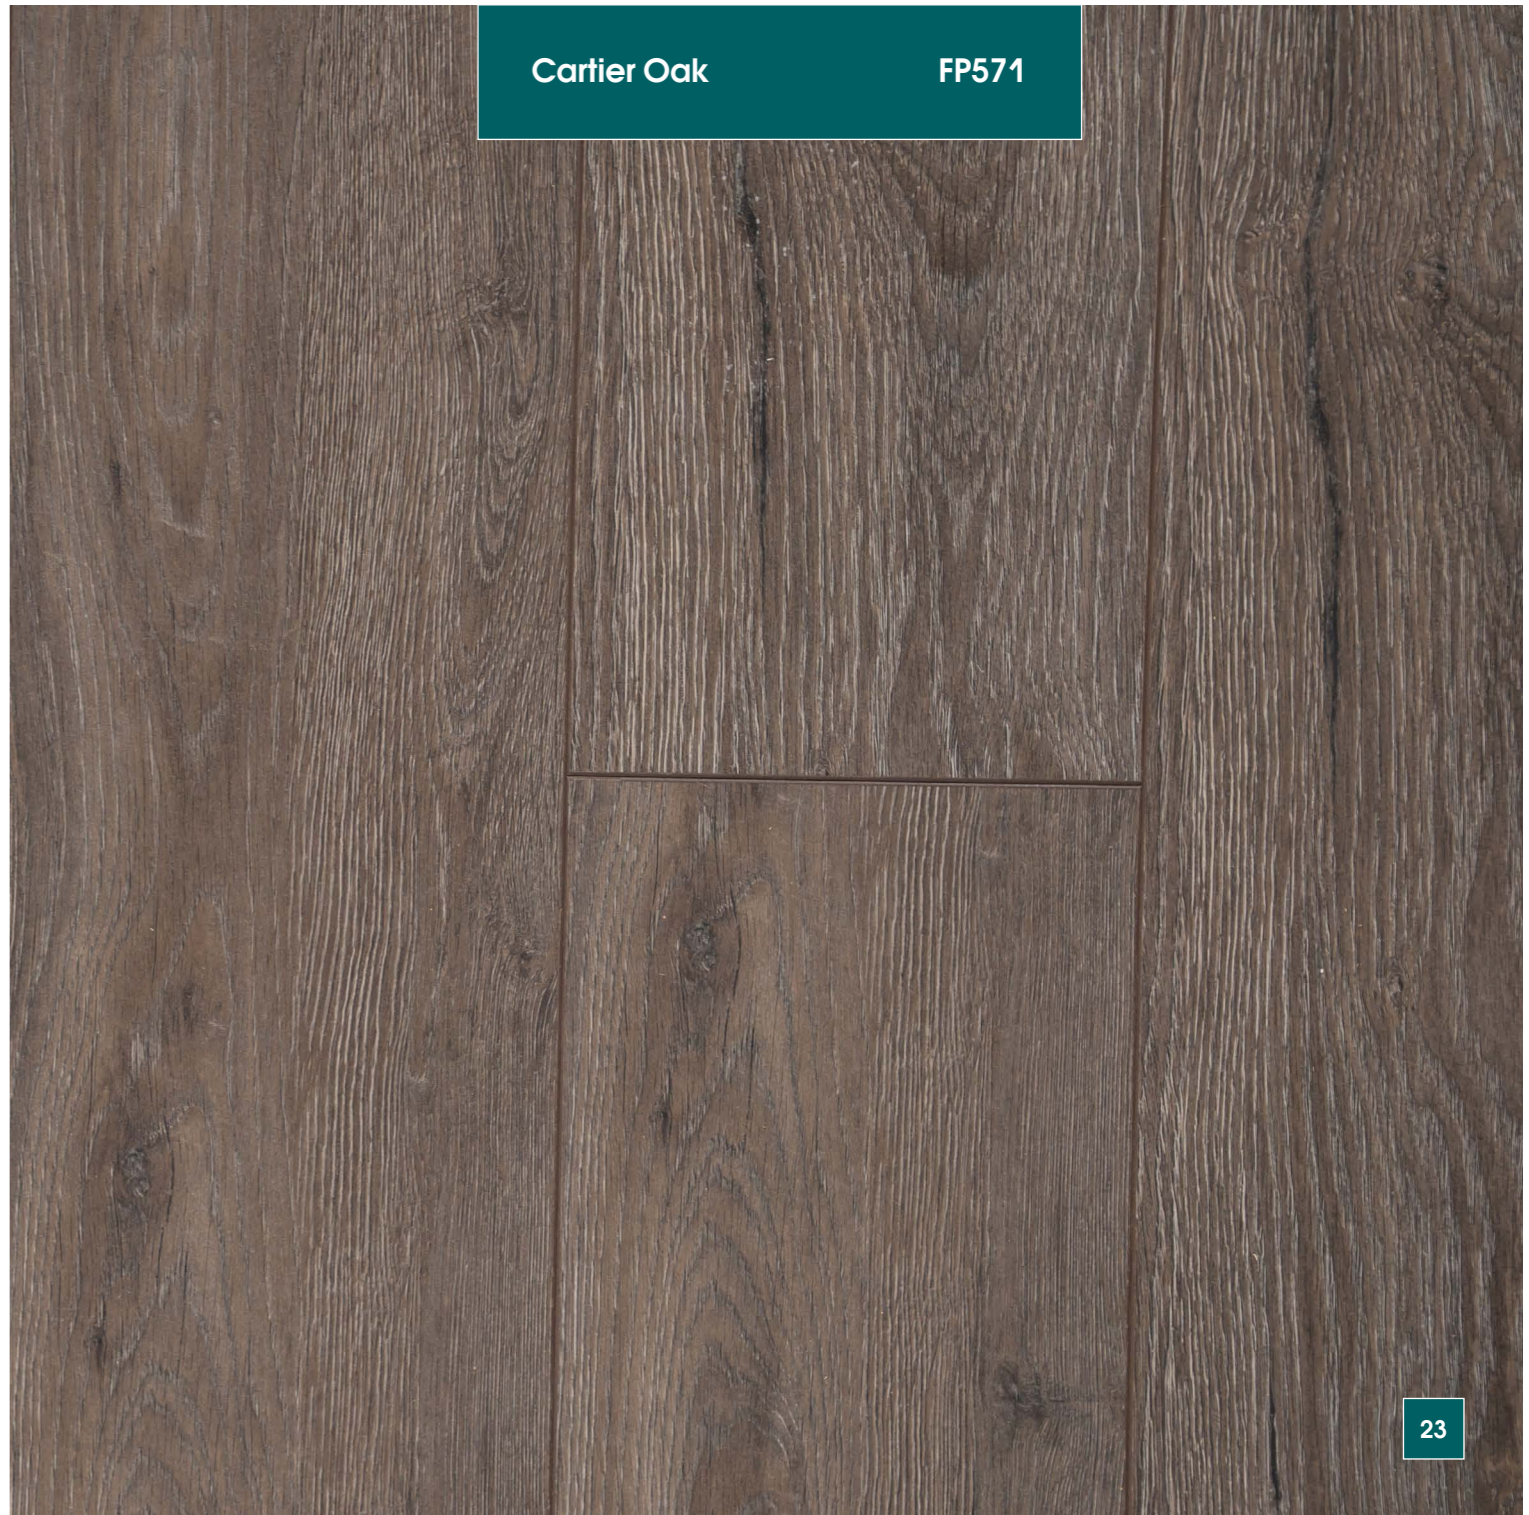

EMERALD 33 CLASS 12 MM




Orlando Oak FP557



Montana Pine FP558



Magellan Oak FP559

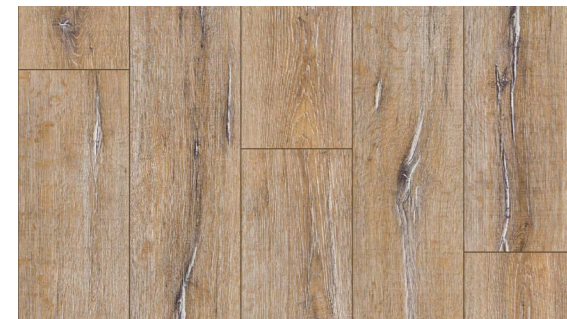

Livingston Oak FP561




Bering Oak FP562




Larsen Oak FP568



Morgan Oak FP569

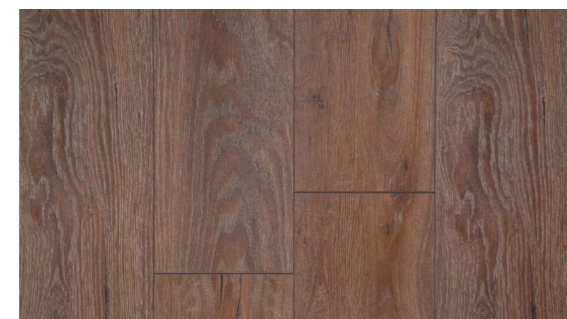

Davis Oak FP570

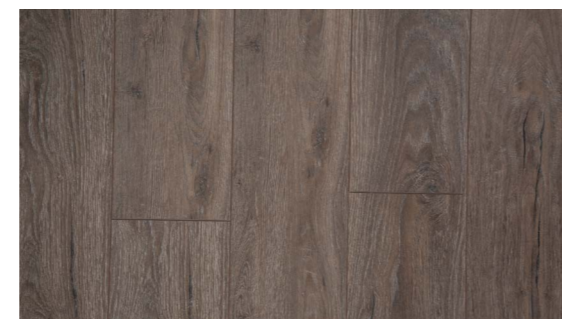

Cartier Oak FP571

| | | | |
|--|--|--|--|
| Bevel sign | Scratch-resistant laminate | Product packaging cannot be used for food products, including their storage | Certificate of the suitability of materials and products for use in construction on the territory of the Republic of Belarus |
| Award "100 Best Goods of the Russian Federation" | Resistance to light. The color and gloss do not change when exposed to sunlight. | Sign of the European Packaging Recycling and Disposal Standard (20-corrugated cardboard) | Wear resistance when moving furniture |
| Maximum temperature of the underfloor heating system must not exceed 28° C | Kastamonu uses a patented licensed technology of the connecting click | Shockproof High resistance to various mechanical damages | Certificate of conformity certifying compliance with requirements of Federal Law No. 123 «Technical Regulations on Fire Safety Requirements» |
| Resistance to high temperatures (for example, unextinguished cigarette) | Efl class - fire hazard classification of flooring materials | Environmentally friendly | Antistatic (does not attract dust) |
| Hygienic, does not require special care, easy-to-clean, just sweep or wipe with a mop. | E1 class - guarantees low formaldehyde content in the plate material | Glue-free system for assembling and disassembling of the click | Good thermal conductivity. Compatible with the «heated floors» system |
| Stain-resistant | DL class - guarantees the absence of pentachlorophenol in the finished product | High-density fiberboard (HDF) base | Non-slip flooring class |
| <p>Confirmation of availability of IMS certificates certifying compliance with standards of EN ISO 9001, EN ISO 14001, OHSAS 18001, registration numbers of certificates and name of the certification authority having issued the certificate</p> | | | <p>Installation instructions</p> |
| <p>2016 Dop: L-001 EN 14041:2004/AC:2006 KASTAMONU INTERGRATED GROUP INDUSTRY LLC © 2006. Kastamonu Flooring. Kastamonu, Turkey. Eurasia office: 5th Floor, 102/2 Almaty territory, building 2/3</p> | | | |



SALES OFFICE

KASTAMONU MARKETING AND TRADE LLC
117638, Russia, Moscow, Odesskaya street, 2 block A,
Lotus Business center «Lotus»

Tel: +7 495 785-77-30

e-mail: sales@keas.ru

FACTORY

KASTAMONU INTERGRATED WOOD INDUSTRY LLC
423600, Russia, Tatarstan Republic, Elabuga district,
SH-3 Street (SEZ Alabuga territory), building 3/3

Tel: +7 495 785-77-30

e-mail: info@keas.ru

www.kastamonu.ru